

PART NUMBER

KAD177559

REV.

DATE

COMMENTS


INITIAL

Electrical Data

Impedance	50Ω
Frequency Range	DC - 13 GHz.
Insertion Loss	0.2 dB @ DC-13 GHz Max
Contact Resistance	
Center	≤ 3 MΩ
Outer	≤ 2 MΩ
Insulation Resistance	5,000M Ω min
Withstanding Resistance	< 3mΩ
Working Voltage	335 VRMS max
VSWR	1.30 @ DC-13 GHz Max

RoHS Compliant**Mechanical Data**

Durability	500 Cycles Min.
Temperature Range:	-55 °C - + 155 °C

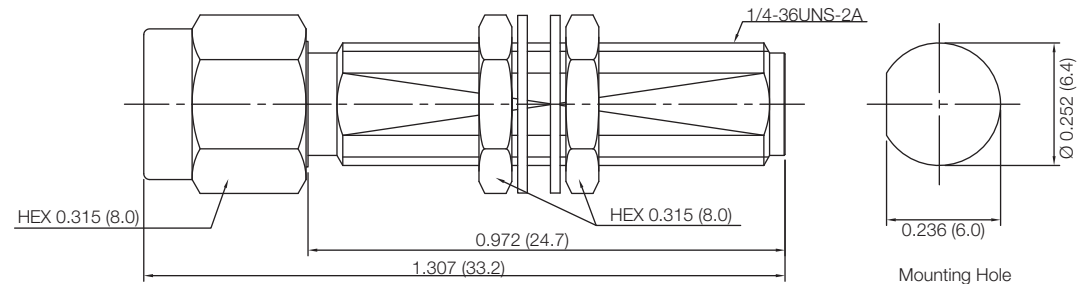

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KAD177559

DESCRIPTION

Adapter, In-Series, SMA Male Plug to Female Jack Bulkhead

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.

Component

Body & Nut
Center Contact
Washer
Insulator

Material

Brass
BeCu
Stainless steel
PTFE

Plating

Gold
Gold
Gold