

PART NUMBER

KAD177921

REV.


INITIAL

Electrical Data

Impedance 50 Ω
 Frequency Range DC - 18 GHz
 VSWR 1.35 Max. @ DC - 11 GHz
 Insertion Loss 0.3 dB Max. @ DC - 11 GHz
 Insulation Resistance 5000 M Ω
 Durability 500 Times Min.

RoHS Compliant

All materials should be RoHS compliant.

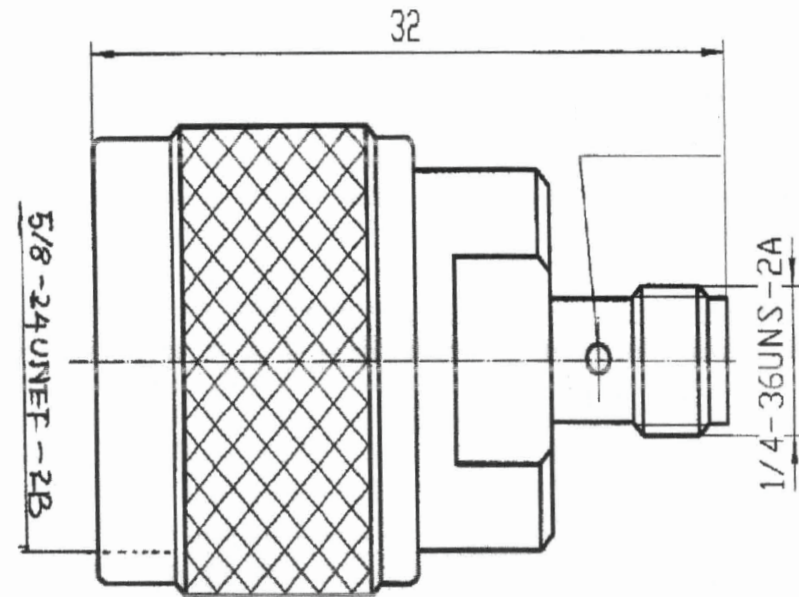

VSWR and Frequency Range Specifications
 are for reference and are dependant on cable
 type and other application specific conditions

Drawing not to scale. Dimensions for reference only

Units: mm

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KAD177921

DESCRIPTION

**Adapter, Between Series,
N Male Plug to SMA Female Jack**

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.

Component

Body
 Center Contact
 Insulator

Material

Stainless Steel
 Be.Bronze
 PTFE

Plating

Passivated
 Gold