

PART NUMBER

**KAD177925**

REV.

DATE

DESC.

INITIAL

**Electrical Data**


Impedance 50  $\Omega$   
 Frequency Range DC - 18 GHz  
 VSWR 1.15 to 18 GHz  
 Insertion Loss  $.05 \sqrt{\text{Frequency}}$

**RoHS Compliant****Materials**

SST, Corrosion-Resistant, Non Magnetic 303, per ASTM A484 and A582. Beryllium Copper per ASTM-B-196, QQ-C-530  
 Oxide-Noryl (tm), MIL-P-46129

**Finish**

Center Conductors and solder Components shall be plated per MIL-G-45204  
 Type II, Class 1 over Nickel plate per QQ-N-290  
 Body and Body Components shall be passivated per ASTM A380

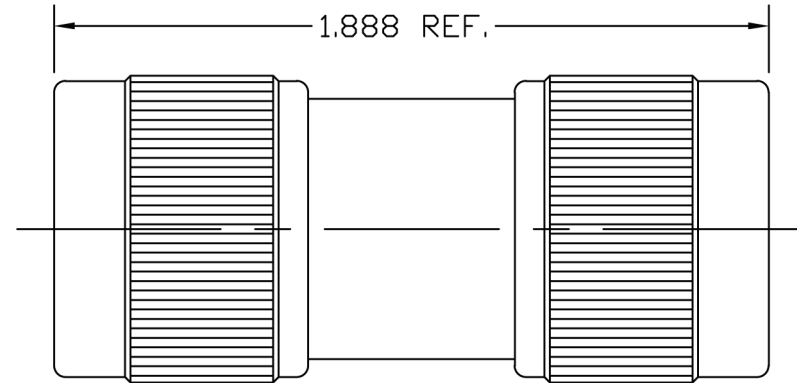

VSWR and Frequency Range Specifications  
 are for reference and are dependant on cable  
 type and other application specific conditions

www.konnecrf.com  
 540 NW University Blvd. Ste. 109  
 Port Saint Lucie, Florida, 34986  
 1-800-790-5887

PART NUMBER

**KAD177925**

DESCRIPTION

**Precision Adapter - In Series - N Male  
 Plug to Male Plug**

CAGE CODE

**664U0**

SIGNATURE

X

THIS DRAWING INCLUDING THE  
 DESIGNS IS THE PROPERTY OF  
 KONNECT RF AND IS NOT TO  
 BE USED FOR ANY PURPOSE  
 WITHOUT OUR APPROVAL.