

PART NUMBER

KAD177939

REV.

INITIAL

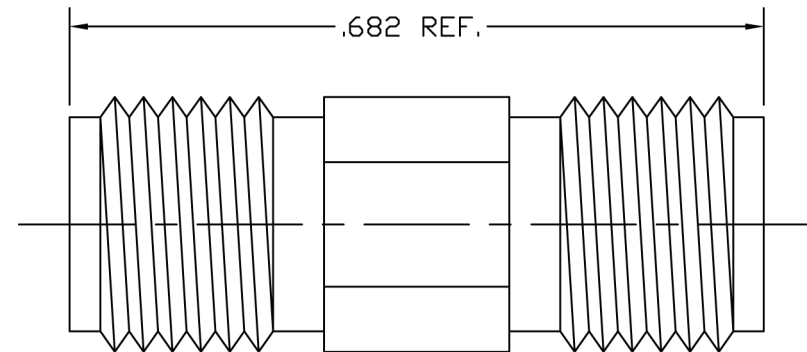
Electrical Data

Frequency Range	DC - 40 GHz
VSWR	1.25 to 40 GHz
Insertion Loss	.05 $\sqrt{\text{Frequency}}$
Temperature Rating	-55 °C to 100 °C
Impedance	50 Ohm
Durability	500 Cycles Min.
Power Handling	15 Watts

RoHS Compliant**Materials**

Stainless Steel. Corrosion-resistant, Non-magnetic 303, per ASTM A484 and A582. Beryllium Copper per ASTM-B-196, QQ-C-530 Oxide-Noryl (tm), MIL-P-46129

Center Conductors and solder components shall be plated per MIL-G-45204 Type II, Class 1 over Nickel plate per QQ-N-290.
Body and Body components shall be passivated per ASTM A380

**Konnect RF**

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KAD177939

DESCRIPTION

Adapter - In-Series - 2.92 Straight Female Jack to Female Jack

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.