

PART NUMBER

KCC188074

REV.

DATE

COMMENTS

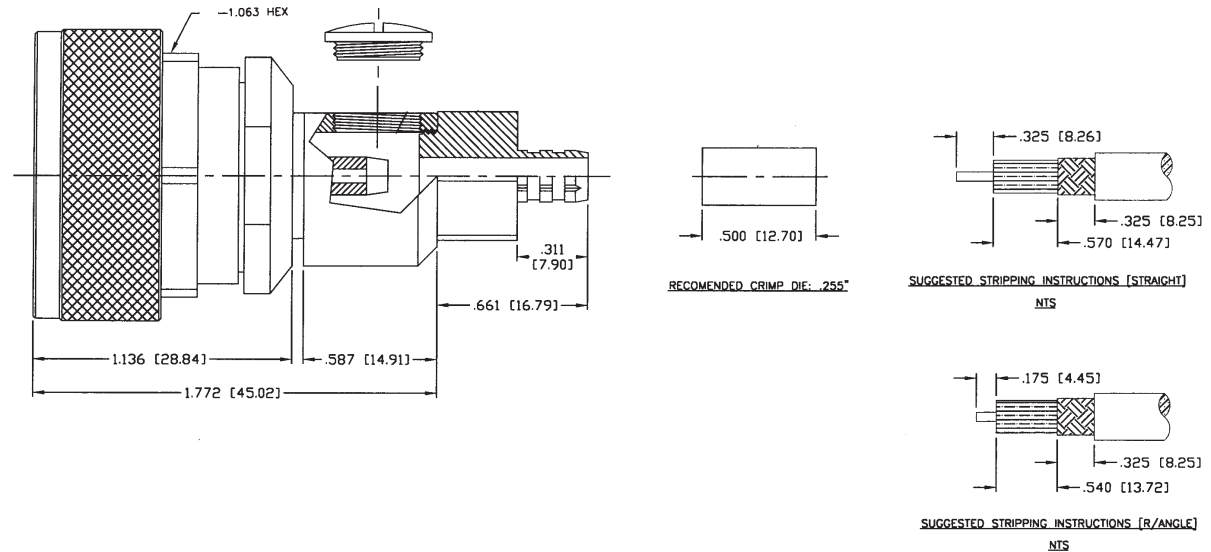
INITIAL

Electrical Data

Impedance 50Ω
 Frequency Range DC - 7.5 GHz.
 Peak Power 13.2 Kw Max
 Average Power 3.0 Kw max

Mechanical Data

Temperature Range: -55 °C - 150 °C

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KCC188074

DESCRIPTION

7/16 DIN Male Plug, Straight or R/A, Crimp

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.

Cable Types: RG-8/X & LMR-240**Component**

Body & ground Ring
 Shell & Screw Cap
 Back Nut & Ferrule
 Center Contact
 Gasket
 Insulator

Material

Brass
 Brass
 Brass
 Brass
 Silicone Rubber
 PTFE

Plating

Silver
 Silver
 Silver
 Silver