

PART NUMBER

**KCC188818**

REV.

DATE

COMMENTS

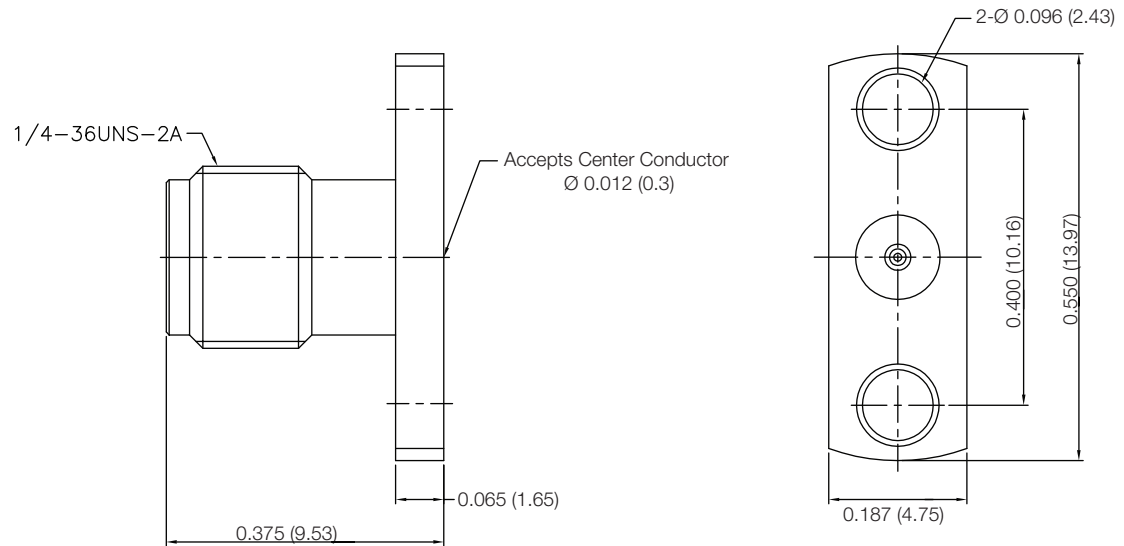
INITIAL

**Electrical Data**

Impedance	50 $\Omega$
Frequency Range	DC-26.5 GHz
Insertion Loss	0.16 dB Max
Voltage Rating	250 VRMS Max
Dielectric Withstanding Voltage	750 VRMS Max
Insulation Resistance	10,000 M $\Omega$
Contact Resistance	
Center	6 M $\Omega$
Outer	2 M $\Omega$

**Mechanical Data**

Temperature Range: -65 °C - 165 °C

**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

**Konnect RF**

WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KCC188818**

DESCRIPTION

**SMA Straight Female Jack Field Replaceable Receptacle, 2 Hole Flange Mount**

CAGE CODE

**664U0**

SIGNATURE

X

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.

**Component**

Body  
Center Contact  
Insulator

**Material**

Stainless Steel  
BeCu  
PTFE

**Plating/Finish**

Passivated  
Gold