

PART NUMBER

KCC188972

REV.

DATE

COMMENTS

INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	DC - 3 GHz.
Working Voltage	335V Max
Contact Resistance	
Center	$\leq 3 \text{ m}\Omega$
Outer	$\leq 2 \text{ m}\Omega$
Dielectric Withstanding Voltage	1,000 VRMS @ Sea Level
VSWR	≤ 1.2 (0.8-2.5G)

Mechanical Data

Durability	500 Cycles Min.
Temperature Range:	-65 $^{\circ}\text{C}$ - 165 $^{\circ}\text{C}$

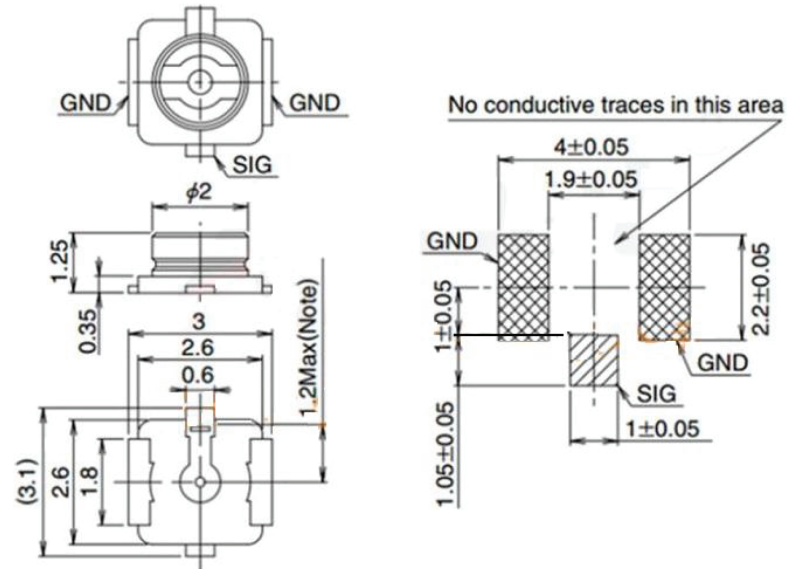
Standards

MIL-C-39012
CECC 22110
IEC 60169-15

**VSWR and Frequency Range Specifications
are for reference and are dependant on cable
type and other application specific conditions**

Drawing not to scale. Dimensions for reference only

Units: mm

RoHS Compliant**Konnect RF**

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KCC188972

DESCRIPTION

IPEX, Solder

CAGE CODE

664U0

SIGNATURE

X

Cable Types: 1.13mm

Component
Body
Center Contact
Insulator

Material
Brass
Brass
PTFE

Plating
Gold
Gold

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.