

PART NUMBER

**KCC189145**

REV.

DATE

COMMENTS

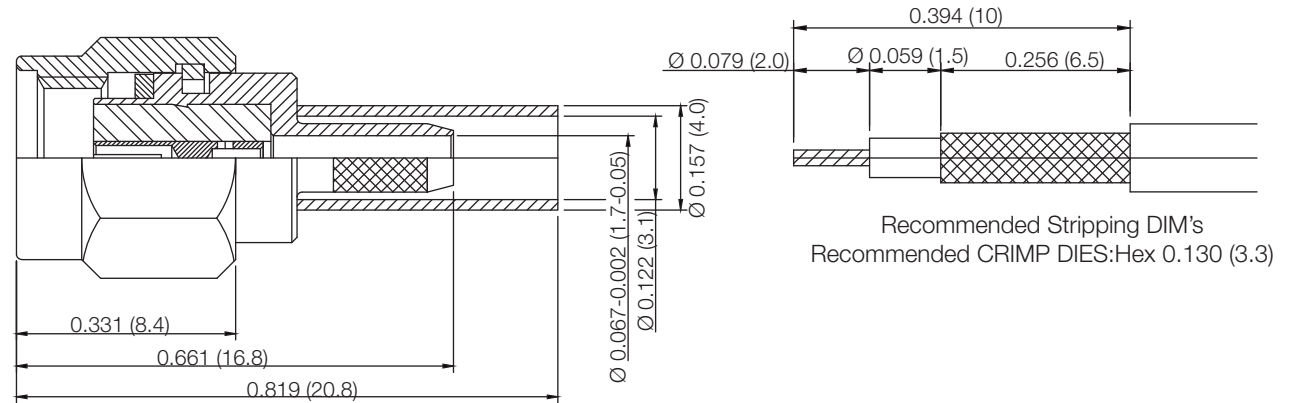
INITIAL

**Electrical Data**

Impedance 50  $\Omega$   
 Frequency Range DC-12.4GHz

**Mechanical Data**

Operating Temperature Range: -55 °C - 155 °C  
 2002/95/EC(RoHS): Compliant

**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

**Konnect RF**

WWW.KONNECTRF.COM  
 1-800-790-5887

PART NUMBER

**KCC189145**

DESCRIPTION

**SMA Straight Male Plug Reverse Polarity, Crimp**

CAGE CODE

**664U0**

SIGNATURE

X

THIS DRAWING INCLUDING THE  
 DESIGNS IS THE PROPERTY OF  
 KONNECT RF AND IS NOT TO  
 BE USED FOR ANY PURPOSE  
 WITHOUT OUR APPROVAL.

**Cable Types:** RG-174 & RG-316/U

Component	Material	Plating
Body & Coupling Cap	Brass	Nickel
Center Contact	BeCu	Gold
Ferrule	Brass	Nickel
Insulator	PTFE	