

PART NUMBER

KCC189279

REV.

DATE

COMMENTS

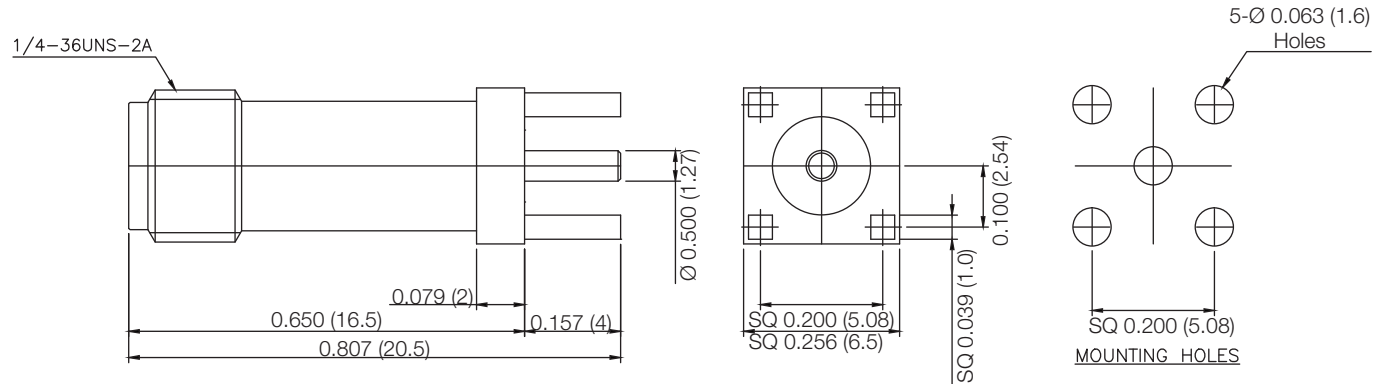
INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	DC - 20 GHz.
Insertion Loss	0.05 \sqrt{f} (GHz)dB
Working Voltage	335 VRMS max
Contact Resistance	≤ 3 m Ω
Insulation Resistance	5,000 M Ω
Dielectric Withstanding Voltage	1,000VRMS
VSWR	1.05 + 0.02f(GHz)

Mechanical Data

Temperature Range: -65 °C - 165 °C

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KCC189279

DESCRIPTION

SMA Straight Female Jack 4 Leg PC Board Receptacle

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.

Component

Body
Center Contact
Insulator

Material

Brass
BeCu
PTFE

Plating

Gold
Gold