

PART NUMBER

KCC189563

REV.

DATE

COMMENTS

INITIAL


Electrical Data

Impedance 50 Ω
 Frequency Range DC - 3 GHz.
 Insulation Resistance 5,000 M Ω
 Dielectric Withstanding Voltage 1,000V Max at Sea Level

RoHS Compliant

Mechanical Data

Durability 500 Cycles Min.
 Temperature Range: -55 °C - 125 °C

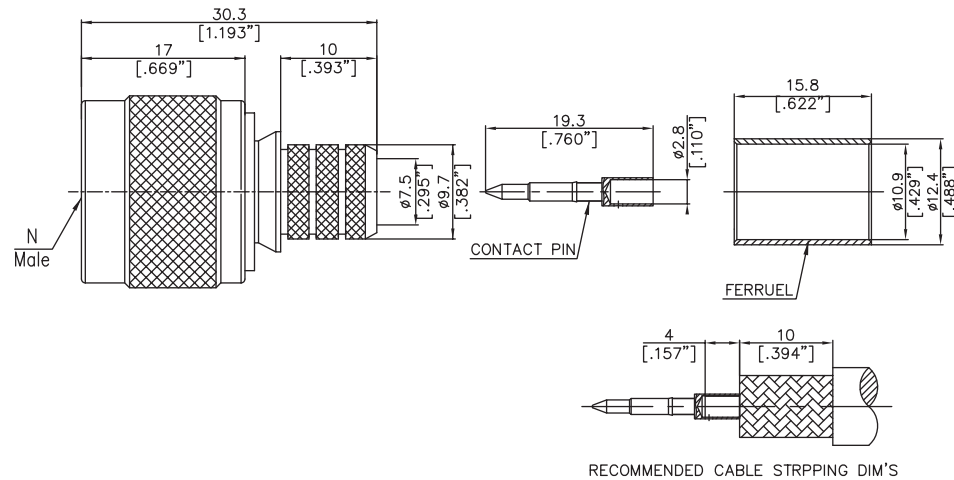

VSWR and Frequency Range Specifications
 are for reference and are dependant on cable
 type and other application specific conditions

Drawing not to scale. Dimensions for reference only

Units: mm (inches)

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KCC189563

DESCRIPTION

N Straight Male Plug, Clamp

CAGE CODE

664U0

SIGNATURE

X

Cable Type: LMR-400

Component
 Body & Nut
 Center Contact
 Insulator

Material
 Brass
 Brass
 PTFE

Plating
 Nickel
 Gold

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.