

PART NUMBER

KCC189598

REV.

DATE

COMMENTS

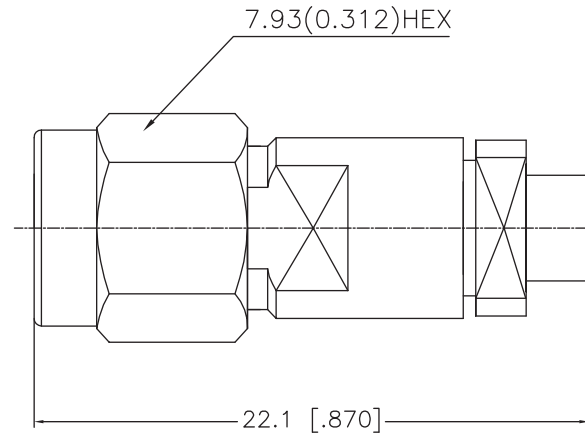
INITIAL

Electrical Data

Impedance 50Ω
 Frequency Range DC - 40 GHz.
 Insertion Loss $0.05\sqrt{\text{Frequency}}$
 Insulation Resistance 5,000 MΩ min
 Dielectric Withstanding Voltage 1,000V Max at Sea Level
 VSWR ≤ 1.30 @ 40 Ghz

Mechanical Data

Temperature Range: -55 °C - 125 °C

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: mm (Inches)

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KCC189598

DESCRIPTION

2.92mm Straight Male Plug

CAGE CODE

664U0

SIGNATURE

X

Cable Types: KRC177636**Component**

Body & Nut
 Center Contact
 Insulator

Material

Stainless Steel
 BeCu
 PEI

Plating/Finish

Passivated
 Gold

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.