

PART NUMBER

**KCC189950**

REV.

DATE

COMMENTS

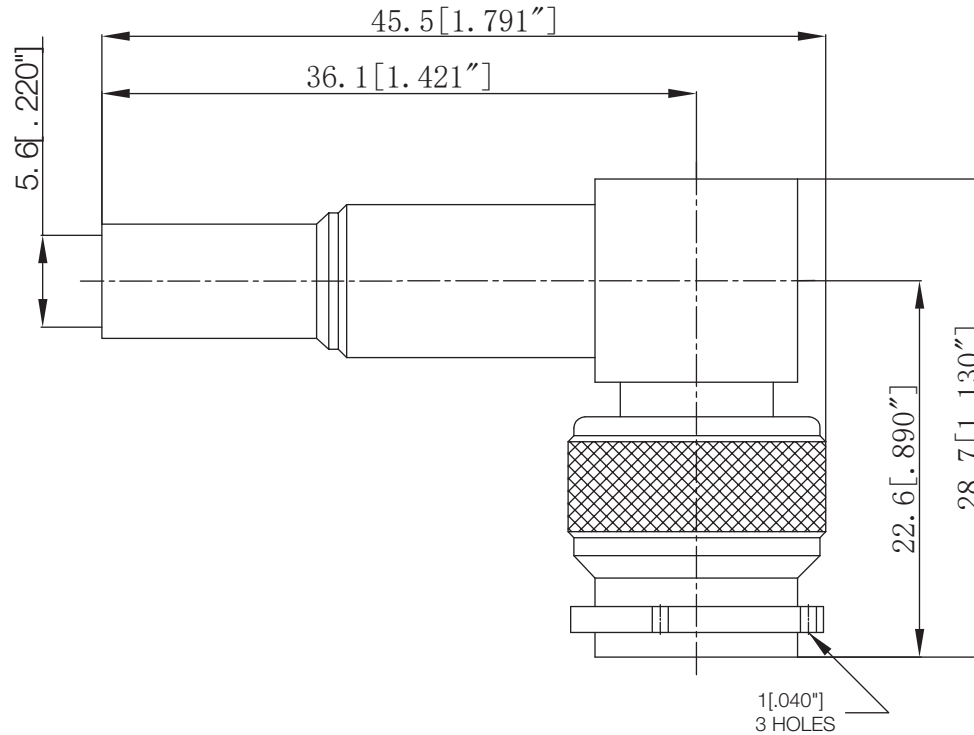
INITIAL

**Electrical Data**

Impedance 50  $\Omega$   
 Frequency Range DC - 11 GHz.  
 Voltage Rating 500 VRMS

**Mechanical Data**

Interface PER MIL-STD-348, 348, 313-1

**RoHS Compliant**

**VSWR and Frequency Range Specifications**  
 are for reference and are dependant on cable  
 type and other application specific conditions

Drawing not to scale. Dimensions for reference only

Units: mm (Inches)

**Konnect RF**

WWW.KONNECTRF.COM  
 1-800-790-5887

PART NUMBER

**KCC189950**

DESCRIPTION

**TNC Right Angle Male Plug, Lockwire Holes**

CAGE CODE

**664U0**

SIGNATURE

X

**Cable Types:** RG-58,141 & 303/U**Component**

Insulator  
 Gasket  
 K-Grip Sleeve  
 Outer Contact  
 Crimp Contact  
 C-Ring  
 All Other Metal Parts

**Material**

Teflon , ASTM-0-1457  
 SIL. RUB., ZZ-R-765  
 COM. Bronzetube, Alloy 220  
 BER. COP., ASTM-B-196  
 BER. COP., ASTM-B-196  
 PHOS. Bronze , QQ-B-750  
 Brass, ASTM-B16

**Plating**

Hard Gold PU. Per MIL-G-45204  
 Hard Gold PU. Per MIL-G-45204  
 Silver PU.PER QQ-S-365

THIS DRAWING INCLUDING THE  
 DESIGNS IS THE PROPERTY OF  
 KONNECT RF AND IS NOT TO  
 BE USED FOR ANY PURPOSE  
 WITHOUT OUR APPROVAL.