

PART NUMBER
KCC197046

REV.	DATE	COMMENTS	INITIAL


Electrical Data

Impedance 50Ω
 Frequency Range DC - 3GHz.
 Insertion Loss $\leq 0.05 \times \sqrt{F(\text{GHz})}$ dB Max
 Voltage Rating 500 VRMS
 Insulation Resistance 5,000 MΩ Min
 Dielectric Withstanding Voltage 2,000 VRMS min
 VSWR 1.5 Max.

Mechanical Data

Durability 1 00 Cycles Min.
 Temperature Range: -40 °C - 85 °C

RoHS Compliant

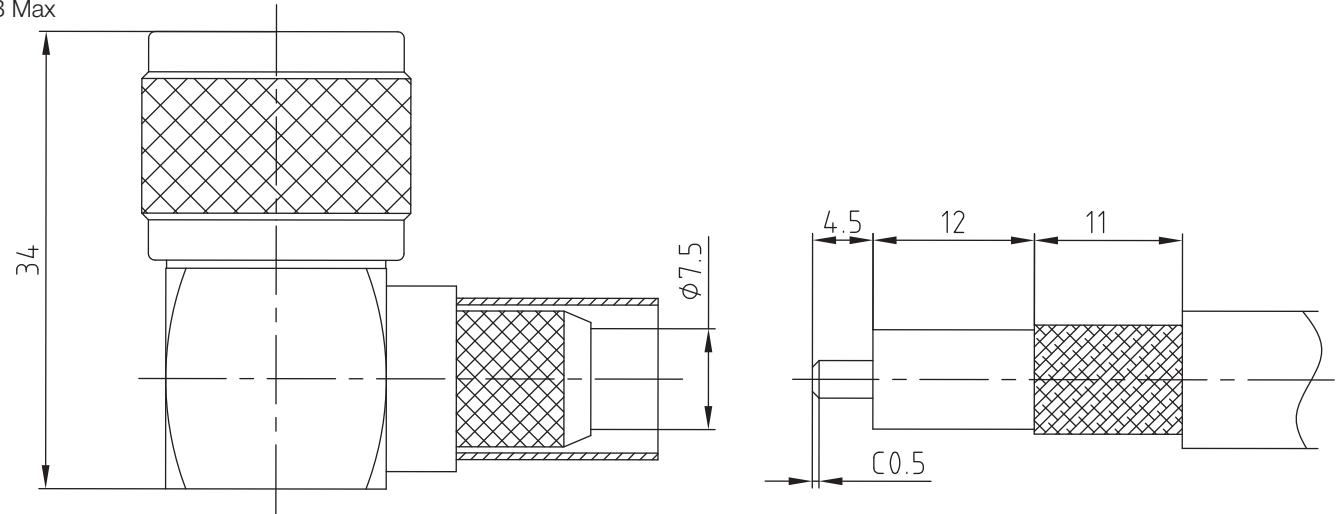


VSWR and Frequency Range Specifications
 are for reference and are dependant on cable
 type and other application specific conditions

Drawing not to scale. Dimensions for reference only Units: mm

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER KCC197046		DESCRIPTION N Right-Angle Male Plug, Crimp		
CAGE CODE 664U0	SIGNATURE  X	Cable Types: RG-214		
THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.		Component	Material	Plating
		Body	Brass	White Bronze
		Center Contact	Brass	Gold
		Insulator	PTFE	Natural