

PART NUMBER

KCC197192

REV.

DATE

COMMENTS


INITIAL

Electrical Data

Impedance 50 Ω
 Frequency Range DC - 40 GHz.
 Insertion Loss $\leq 0.5\text{dB@ } 40\text{GHz dB}$
 Insulation Resistance 5,000 M Ω Min
 Dielectric Withstanding Voltage 1,000V Max At Sea Level
 VSWR ≤ 1.15

RoHS Compliant**Mechanical Data**

Durability 500 Cycles Min.
 Temperature Range: -55 $^{\circ}\text{C}$ - 165 $^{\circ}\text{C}$

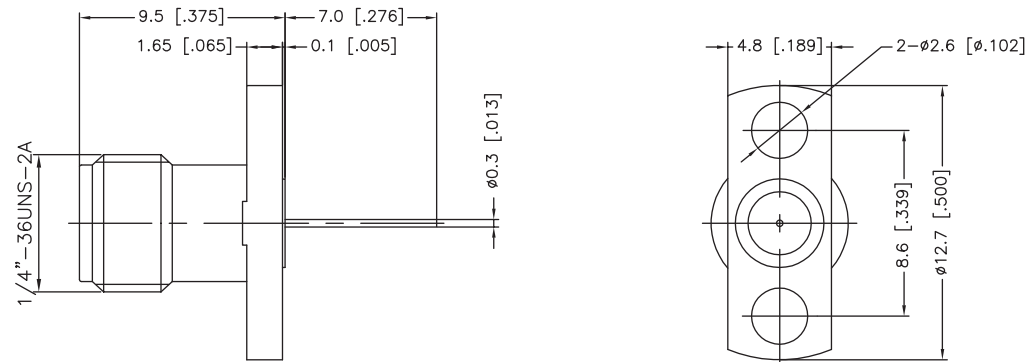

Drawing not to scale. Dimensions for reference only

Units: mm (Inches)

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KCC197192

DESCRIPTION

2.9mm Straight Female Jack Field Replaceable Receptacle, 2 Hole Flange Mount

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.

Component

Body
 Center Contact
 Insulator

Material

Stainless Steel
 BeCu
 PEI

Plating/Finish

Passivated
 Gold