

PART NUMBER

KCC197194

REV.

DATE

COMMENTS

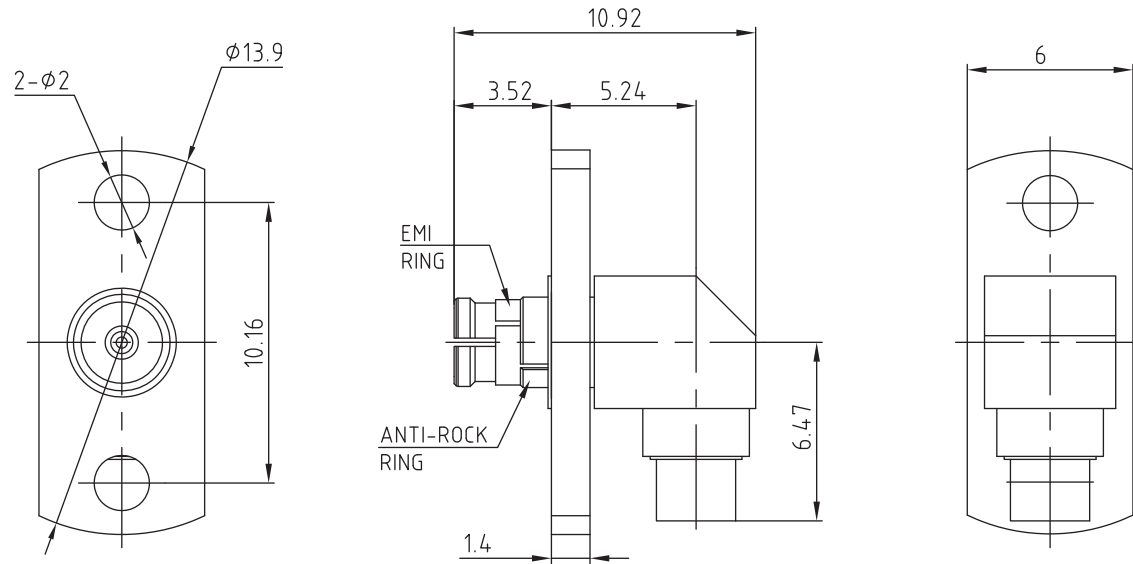
INITIAL

Electrical Data

Impedance	50Ω
Frequency Range	DC - 40 GHz.
Insertion Loss	0.05XSQRT[F(GHz)] dB Max
Voltage Rating	500 VRMS
Insulation Resistance	5,000 MΩ min
Dielectric Withstanding Voltage	750 VRMS min
VSWR	1.5Max

Mechanical Data

Temperature Range:	-40 °C - 85 °C
Durability	100 Cycles Min
Compatible With all Standard MILSTD 348	

RoHS Compliant

VSWR and Frequency Range Specifications are for reference and are dependant on cable type and other application specific conditions

Drawing not to scale. Dimensions for reference only

Units: mm

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KCC197194

DESCRIPTION

SMP Right Angle Female Jack, Solder, 2 Hole Flange Mount

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.

Cable Types: .086 S/R (RG-405)

Component	Material	Plating
Body	Brass	Gold
Outer Contact	BeCu	Gold
Inner Contact	BeCu	Gold
Insulator	PTFE	Natural