

PART NUMBER

**KCC197266**

REV.

DATE

COMMENTS

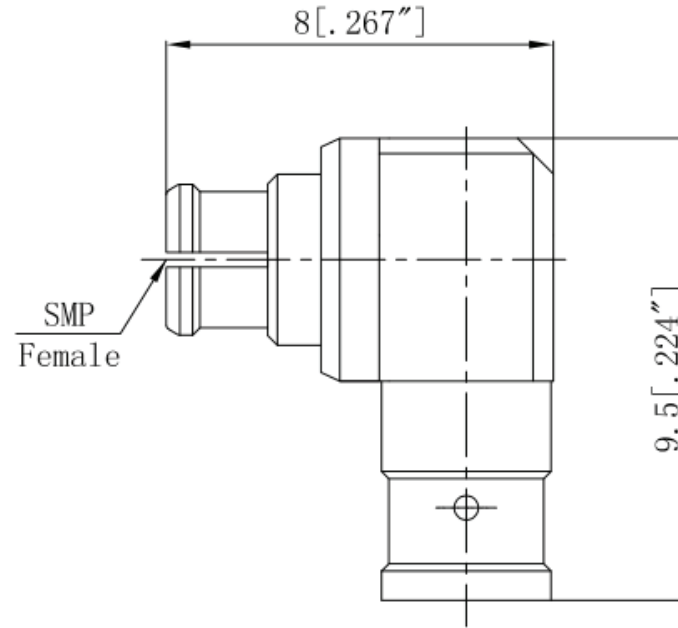
INITIAL

**Electrical Data**

Impedance 50  $\Omega$   
 Frequency Range DC - 40 GHz.  
 Insulation Resistance  $\geq 5,000$  M $\Omega$   
 Dielectric Withstanding Voltage 500V  
 VSWR  $\leq 1.50$

**Mechanical Data**

Temperature Range: -55 °C - 165 °C  
 Durability 500 Cycles  
 Standard and Spec.: GJB 681A  
 2002,GJB360B 2009

**RoHS Compliant**

**VSWR and Frequency Range Specifications**  
 are for reference and are dependant on cable  
 type and other application specific conditions

Drawing not to scale. Dimensions for reference only

Units: mm (Inches)

**Konnect RF**

WWW.KONNECTRF.COM  
 1-800-790-5887

PART NUMBER

**KCC197266**

DESCRIPTION

**SMP Right Angle Female Jack, Solder**

CAGE CODE

**664U0**

SIGNATURE

X

**Cable Types:** .085 S/R (RG-405)**Component**

Body  
 Center Contact  
 Insulator

**Material**

BeCu  
 BeCu  
 PTFE

**Plating**

Gold  
 Gold

THIS DRAWING INCLUDING THE  
 DESIGNS IS THE PROPERTY OF  
 KONNECT RF AND IS NOT TO  
 BE USED FOR ANY PURPOSE  
 WITHOUT OUR APPROVAL.