

PART NUMBER

KCC197276

REV.

DATE

COMMENTS

INITIAL

Electrical Data

Impedance	75 Ω
Frequency Range	DC - 3GHz.
Working Voltage	$\leq 170V$ RMS, 50Hz, at sea level
Contact Resistance	
Center	≤ 10 m Ω
Outer	≤ 5 m Ω
Insulation Resistance	$\geq 1000M\Omega$
Dielectric Withstanding Voltage	$\geq 500V$ RMS, 50Hz, at sea level
VSWR	≤ 1.30

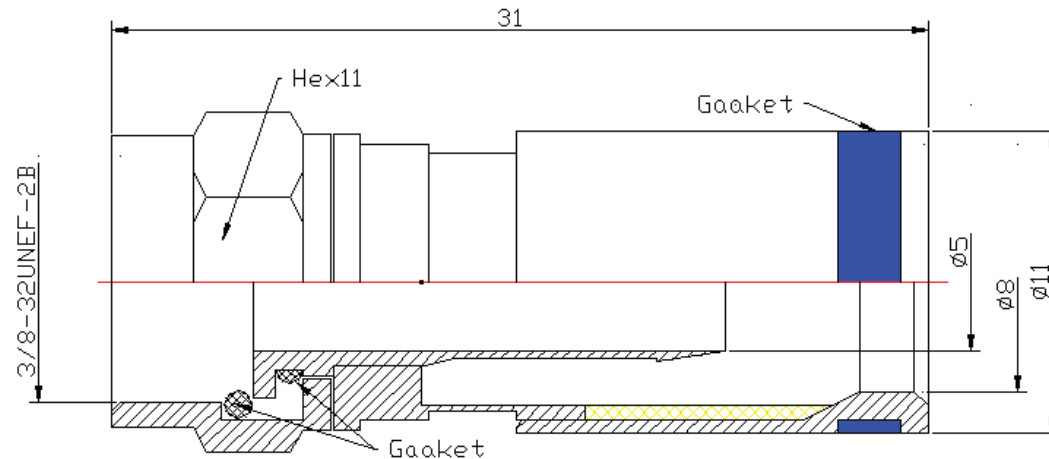
Mechanical Data

Durability	≥ 500 Cycles Min.
Temperature Range:	-40 $^{\circ}C$ - 85 $^{\circ}C$
According to IEC 60169-24	

VSWR and Frequency Range Specifications are for reference and are dependant on cable type and other application specific conditions

Drawing not to scale. Dimensions for reference only

Units: mm

RoHS Compliant**Konnect RF**

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KCC197276

DESCRIPTION

75 Ohm Compression Type F Connector, Crimp

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.

Cable Types: RG-6**Component**

Body & Coupling Nut
Inner Liner
Outer Liner
Gasket

Material

Brass
Brass
POM
Silicone Rubber

Plating

Nickel
Nickel