

PART NUMBER

**KCC197334**

REV.

DATE

COMMENTS

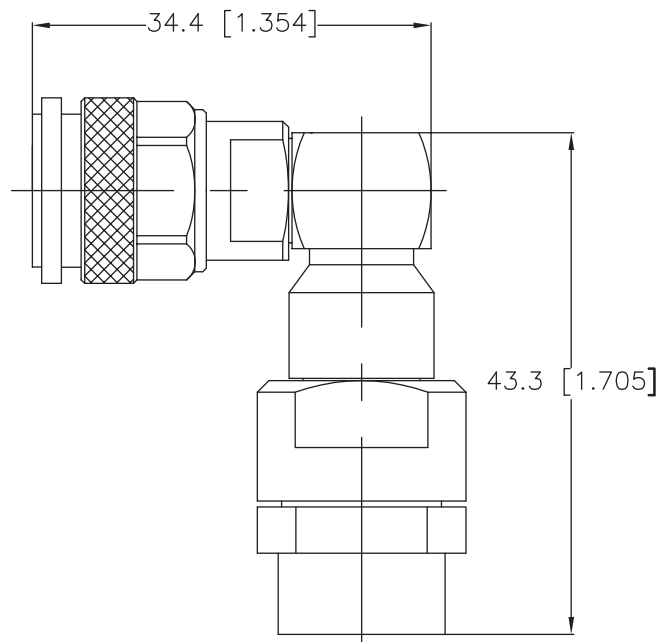
INITIAL

**Electrical Data**

Impedance 50  $\Omega$   
 Frequency Range DC - 10 GHz.  
 Insulation Resistance  $\geq 5,000M\Omega$  min  
 Dielectric Withstanding Voltage 1,000V Max At Sea Level  
 VSWR  $\leq 1.30$

**Mechanical Data**

Durability 500 Cycles Min.  
 Temperature Range: -55 °C - 165 °C

**RoHS Compliant**

**VSWR and Frequency Range Specifications**  
 are for reference and are dependant on cable  
 type and other application specific conditions

Drawing not to scale. Dimensions for reference only

Units: mm (Inches)

**Konnnect RF**

WWW.KONNECTRF.COM  
 1-800-790-5887

PART NUMBER

**KCC197334**

DESCRIPTION

**TNC Right Angle Male Plug, Clamp**

CAGE CODE

**664U0**

SIGNATURE

**X**

THIS DRAWING INCLUDING THE  
 DESIGNS IS THE PROPERTY OF  
 KONNECT RF AND IS NOT TO  
 BE USED FOR ANY PURPOSE  
 WITHOUT OUR APPROVAL.

**Cable Types:** SFT-226**Component**

Body & Nut  
 Center Contact  
 Insulator

**Material**

Brass  
 Brass  
 PTFE

**Plating**

White Bronze  
 Gold