

PART NUMBER

KCC197377

REV.

DATE

COMMENTS

INITIAL


Electrical Data

Impedance	50 Ω
Frequency Range	DC - 12.4 GHz.
Insertion Loss	0.3 dB max @ DC - 1.5 GHz
Operating Voltage	250 VRMS
Insulation Resistance	1000 M Ω
VSWR	1.20

Mechanical Data

Durability	500 Cycles Min.
Temperature Range:	-55 °C - 125 °C
Mating Torque	0.23 N.M (2 in lbs)

RoHS Compliant

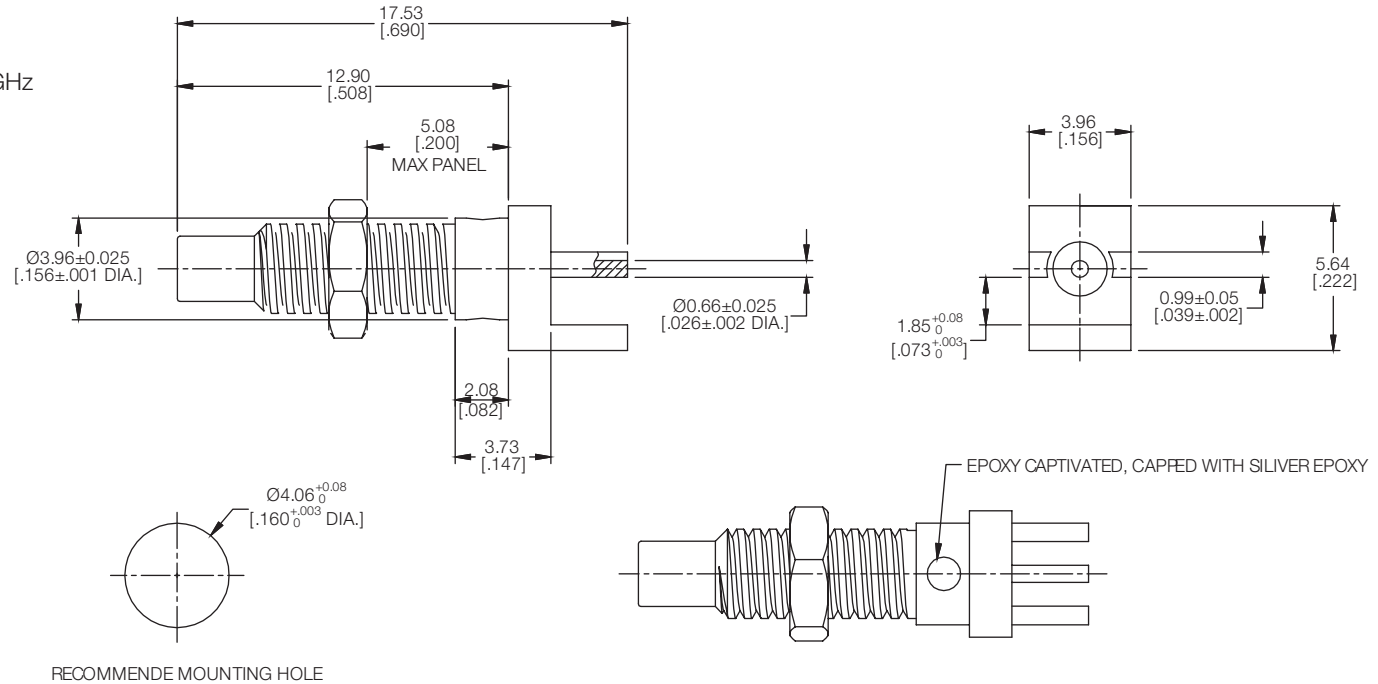

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KCC197377

DESCRIPTION

**SSMC Straight Male Jack PC Board
End Launch .067", Epoxy Captivated**

CAGE CODE

664U0

SIGNATURE

X

Component

Body

Center Contact

Fastening Nut

Insulator

Material

Stainless Steel

BeCu

Stainless Steel

PTFE

Plating

Gold

Gold

Gold

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.