

PART NUMBER

**KCC197445**

REV.

DATE

COMMENTS

INITIAL

**Electrical Data**



Impedance 50  $\Omega$   
 Frequency Range DC - 6GHz.  
 Working Voltage 1,000 VRMS  
 VSWR 1.20 @ 6.0GHz

**Mechanical Data**

Temperature Range: -45 °C - 125 °C

**RoHS Compliant**

5/8-24UNEF-2A

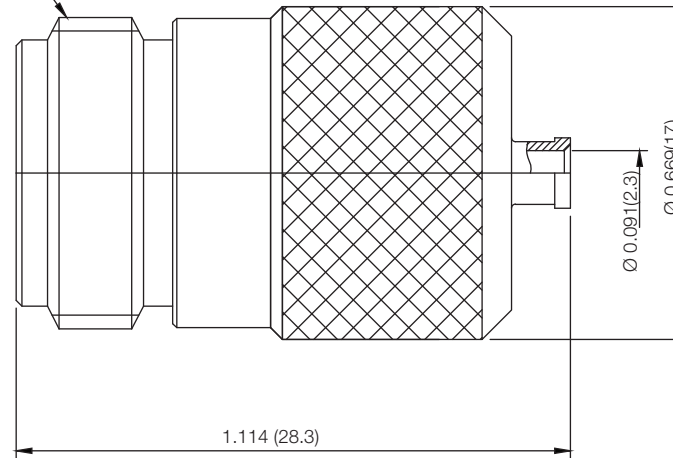

**VSWR and Frequency Range Specifications**  
 are for reference and are dependant on cable  
 type and other application specific conditions

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

**Konnnect RF**

WWW.KONNECTRF.COM  
 1-800-790-5887

PART NUMBER

**KCC197445**

DESCRIPTION

**N Straight Female Jack, Solder**

CAGE CODE

**664U0**

SIGNATURE

X

THIS DRAWING INCLUDING THE  
 DESIGNS IS THE PROPERTY OF  
 KONNECT RF AND IS NOT TO  
 BE USED FOR ANY PURPOSE  
 WITHOUT OUR APPROVAL.

**Cable Types:** .085 S/R (RG-405)**Component**

Body  
 Center Contact  
 Insulator  
 Insert pin

**Material**

Brass  
 BeCu  
 PTFE  
 Brass

**Plating**

White Bronze  
 Gold  
 Gold