

PART NUMBER

KCC197610

REV.

DATE

COMMENTS

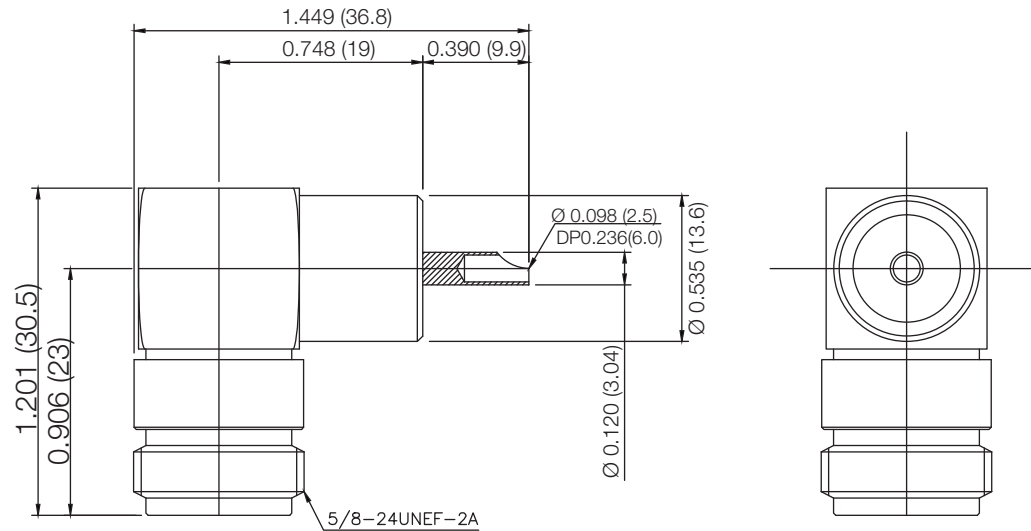
INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	DC - 6GHz.
Insulation Resistance	5,000 MΩ
Working Voltage	2,500V rms
VSWR	1.3 Max @ DC-4GHz
Test Voltage	2,500V rms

Mechanical Data

Durability	500 Cycles Min.
Temperature Range:	-55 °C - +155 °C

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KCC197610

DESCRIPTION

N Right Angle Female Jack Receptacle, Nickel/Brass, Solder Pot

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.

Component

Body
Center Contact

Insulator

Material

Brass
Brass
BeCu
PTFE

Plating

Nickel
Gold
Gold