

PART NUMBER

KCC197751

REV.

DATE

COMMENTS

INITIAL


Electrical Data

Impedance 50 Ω
 Frequency Range DC - 33 GHz.
 Insulation Resistance \geq 5000 M Ω
 Dielectric Withstanding Voltage 500 V

Mechanical Data

Durability 500 Cycles
 Temperature Range: -55 °C - 165 °C

RoHS Compliant

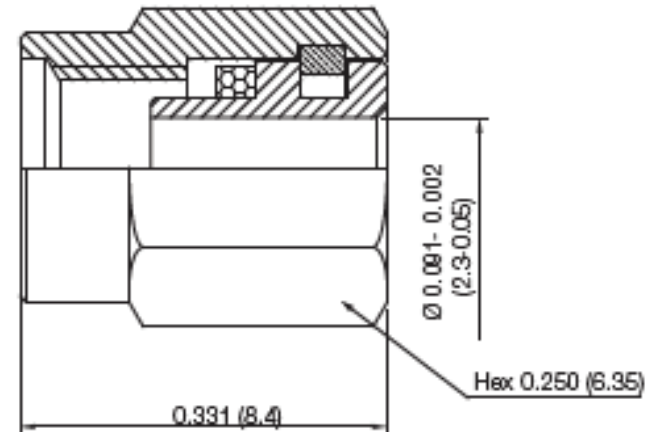

**VSWR and Frequency Range Specifications
 are for reference and are dependant on cable
 type and other application specific conditions**

Drawing not to scale. Dimensions for reference only Units: inches (mm)

**WWW.KONNECTRF.COM
 1-800-790-5887**

PART NUMBER

KCC197751

DESCRIPTION

SSMA Straight Male Plug, Solder, Cable Center Conductor

CAGE CODE

664U0

SIGNATURE

X

Cable: for .085 S/R (RG-405)

| Component | Material | Plating |
|----------------|----------|---------|
| Body | Brass | Gold |
| Center Contact | Brass | Gold |
| Nut | Brass | Gold |
| Insulator | PTFE | |

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.