

PART NUMBER

KCC197548

REV.

DATE

COMMENTS

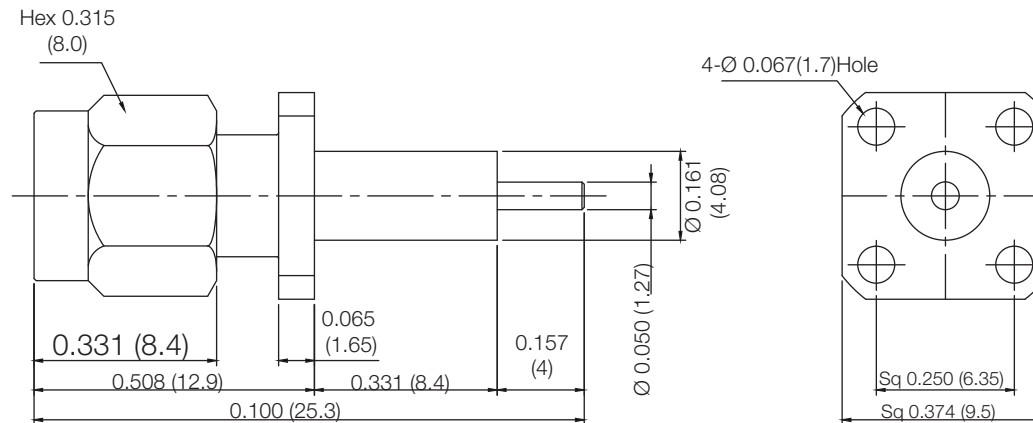
INITIAL

Electrical Data

Impedance 50 Ω
 Frequency Range DC - 18 GHz.
 Voltage Rating 500 max
 Insulation Resistance 5,000 M Ω
 Dielectric Withstanding Voltage 750 VRMS
 VSWR 1.35 max @ 18GHz

Mechanical Data

Operating Temperature Range: -45 °C - 145 °C

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KCC197548

DESCRIPTION

**SMA Straight Male Plug Receptacle,
 4 Hole Flange Mount, Blunt Post, Extended Teflon**

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.

Component

Body & Coupling
 Center Contact
 Insulator

Material

Stainless Steel
 Brass
 PTFE

Plating/Finish

Passivated
 Gold