

PART NUMBER

KCI177103

REV.

DATE

COMMENTS

INITIAL

Electrical Data

Frequency Range 0.5 - 1 GHz.
 Insertion Loss 0.70 dB
 Isolation 17 dB
 VSWR 1.35


Mechanical Data

Operating Temperature: 20 °C - 30 °C

Standards

Forward Power: 30 W
 Reverse Power: 30 W
 Direction: Clockwise

RoHS Compliant

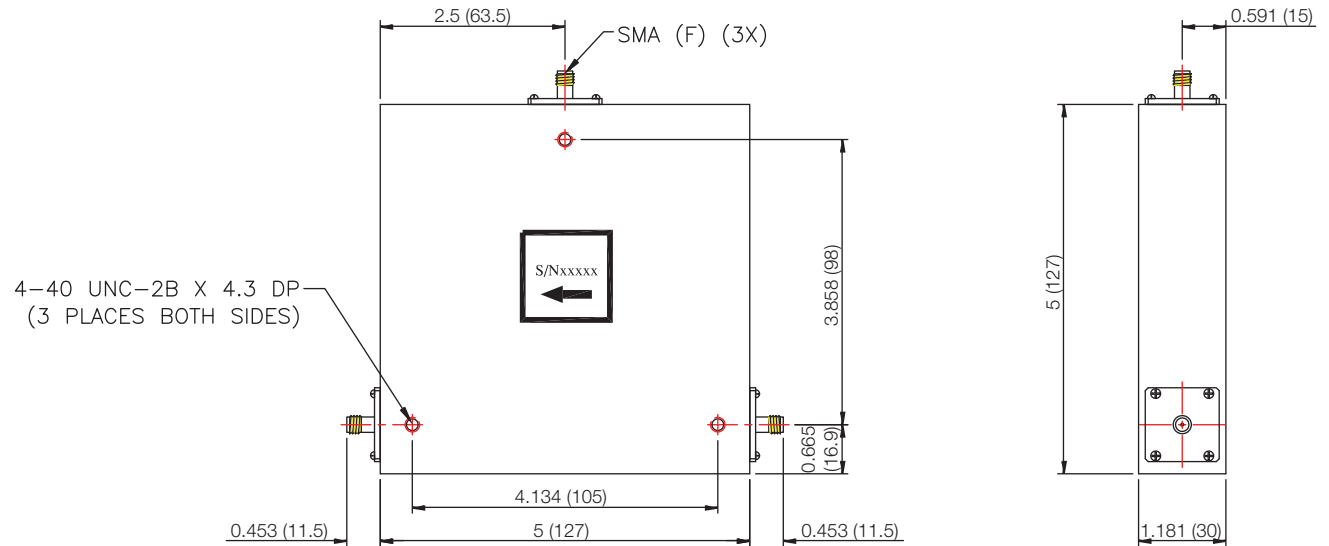

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KCI177103

DESCRIPTION

Circulator, SMA Female

CAGE CODE

664U0

SIGNATURE

X

Component
 Body

Material
 Aluminium

Plating
 Nickel

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.