

PART NUMBER

KCI177231

REV.

DATE

COMMENTS

INITIAL

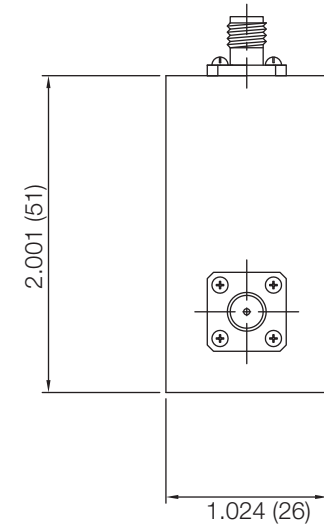
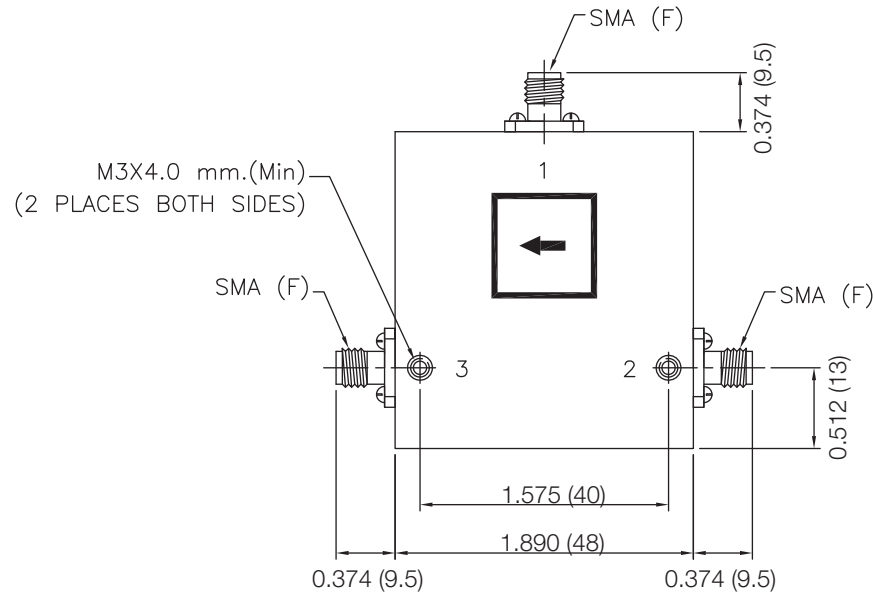
Electrical Data

Impedance	Ω
Frequency Range	0.4 - 0.5 GHz.
Isolation	20 dB
Average Power	100 Watts
Insertion Loss	0.50 dB
Peak Power	500 W
VSWR	1.25

Mechanical Data

Temperature Range: -10 °C - 60 °C

Room Temp :	+25±5°C
Isolation dB (Min.) :	21
Insertion Loss dB (Max.) :	0.40
VSWR (Max.) :	1.19

**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KCI177231

DESCRIPTION

Circulator, SMA Female

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.