

PART NUMBER

KCI177233

REV.

DATE

COMMENTS

INITIAL

RoHS Compliant**Electrical Data**

Impedance	50 Ω
Frequency Range	5-6 GHz.
Insertion Loss	0.50 dB
Isolation	20 dB
VSWR	1.25 Max


Mechanical Data

Temperature Range: -20 °C - 80 °C

Room Temp :	+25 \pm 5°C
Isolation dB (Min.) :	23
Insertion Loss dB (Max.) :	0.35
VSWR (Max.) :	1.15

Forward Power : 60 W average , 250 W peak

Reverse Power : 60 W average , 250 W peak

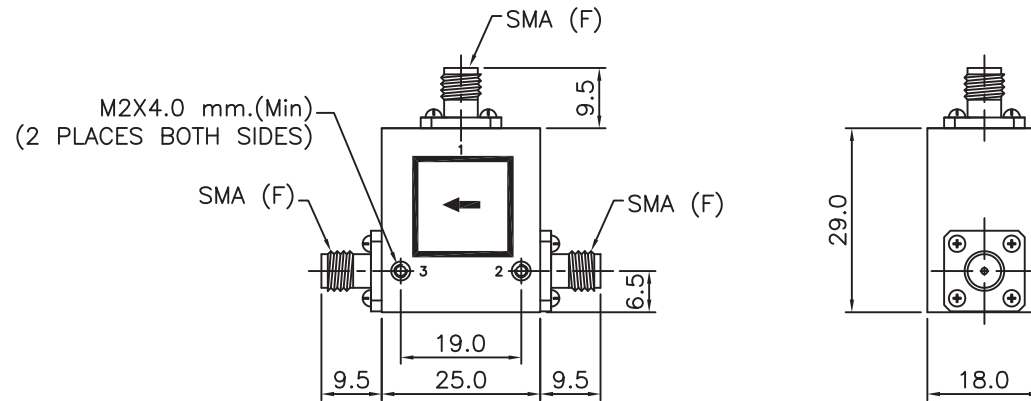

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM

1-800-790-5887

PART NUMBER

KCI177233

DESCRIPTION

Circulator, SMA Female

CAGE CODE

664U0

SIGNATURE

X

Component
BodyMaterial
AluminumPlating/Finish
Black Paint

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.