

PART NUMBER

KCI177234

REV.

DATE

COMMENTS


INITIAL

RoHS Compliant**Electrical Data**

Frequency Range 5-6 GHz.
 Isolation 20 dB
 Insertion Loss 0.50 dB
 VSWR 1.25
 Operating Temp -20°C - 80°C

Room Temp :	+25±5°C
Isolation dB (Min.) :	23
Insertion Loss dB (Max.) :	0.35
VSWR (Max.) :	1.15

Forward Power : 2 W average , 20 W peak
 Reverse Power : 2 W average , 20 W peak

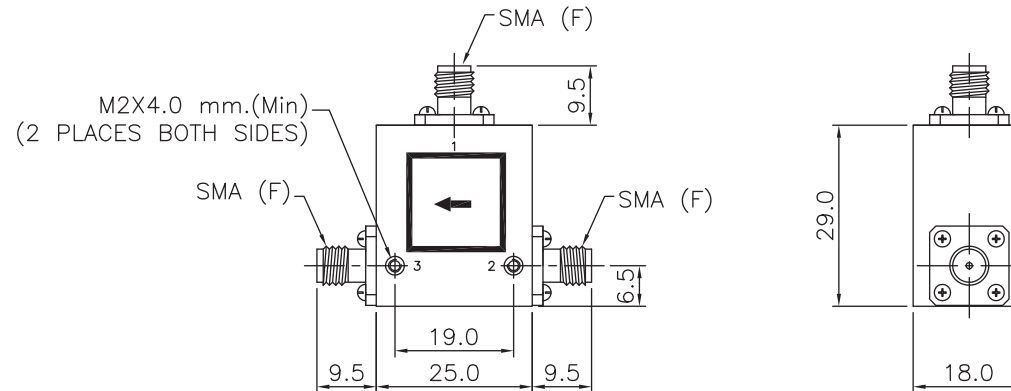

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KCI177234

DESCRIPTION

Circulator, SMA Female

CAGE CODE

664U0

SIGNATURE

X

Component
 Body

Material
 Aluminum

Plating/Finish
 Black Paint

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.