

PART NUMBER

KCI177236

REV.

DATE

COMMENTS

INITIAL

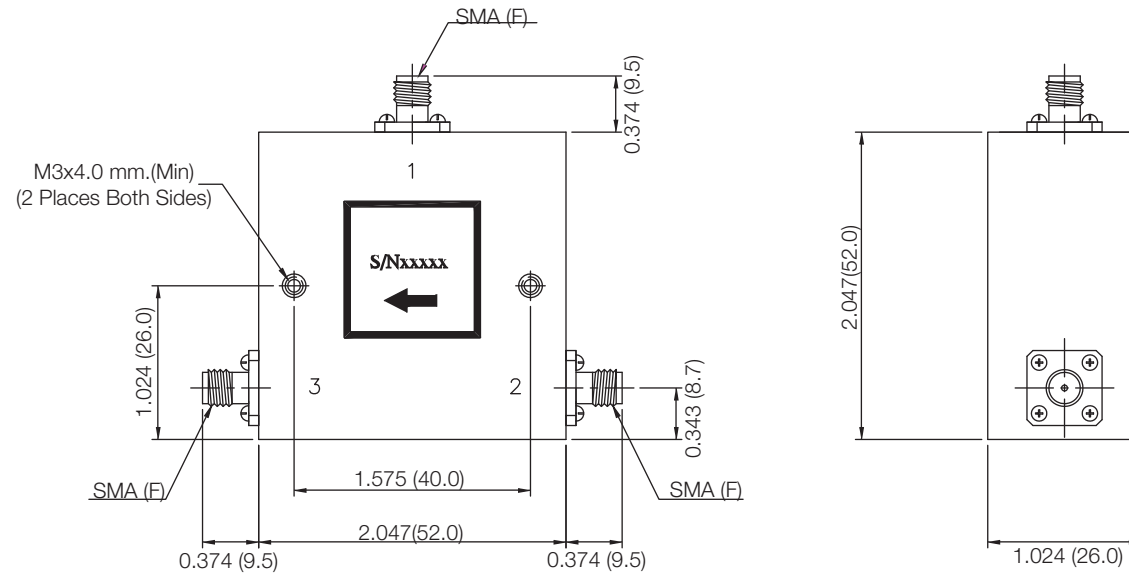
Electrical Data

Frequency Range	0.700-1.000 GHz.
Isolation	15 dB Min
Insertion Loss	0.95 Max
Average Power	100 Watts
Peak Power	500 Watts
VSWR	1.55 Max

Mechanical Data

Operating Temperature : 0 °C - 50 °C

Room Temp :	+25±5°C
Isolation dB (Min.) :	17
Insertion Loss dB (Max.) :	0.50
VSWR (Max.) :	1.35

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KCI177236

DESCRIPTION

Circulator, SMA Female

CAGE CODE

664U0

SIGNATURE

X

Component
Body

Material
Aluminum

Plating/Finish
Black Painted

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.