

PART NUMBER

KCI177237

REV.

DATE

COMMENTS

INITIAL

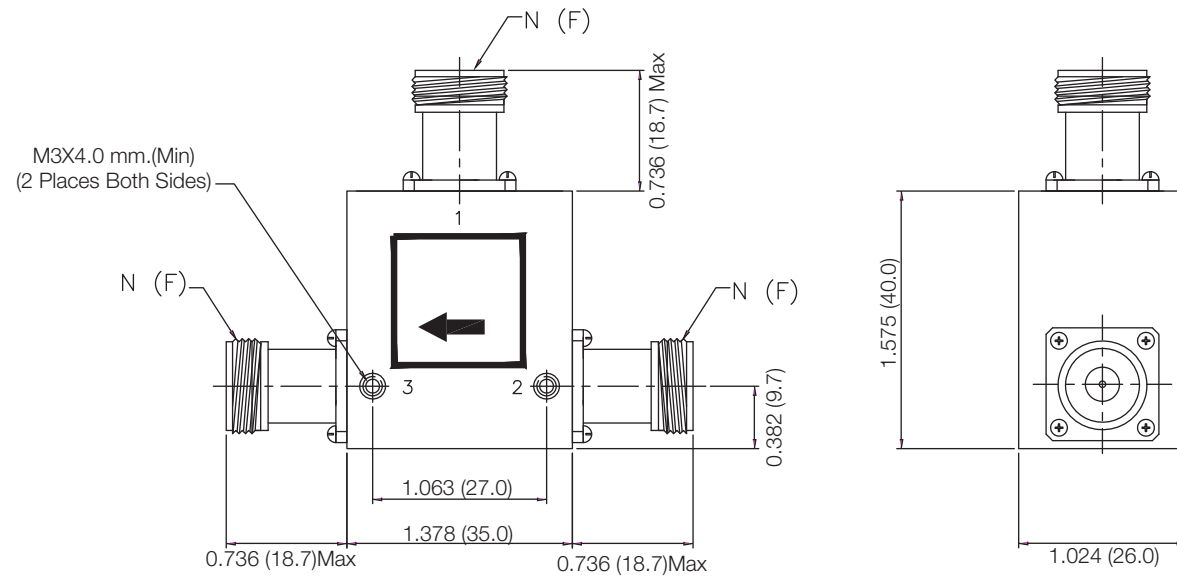
Electrical Data

Impedance	50 Ω
Frequency Range	2.700-3.100 GHz.
Insertion Loss	0.50 dB
Isolation	20
Average Power	300
VSWR	1.25

Mechanical Data

Room Temperature : -20 °C - 70 °C

Room Temp :	+25 \pm 5°C
Isolation dB (Min.) :	22
Insertion Loss dB (Max.) :	0.40
VSWR (Max.) :	1.18

**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KCI177237

DESCRIPTION

Circulator, N Female

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.