

PART NUMBER

**KCI177241**

REV.

DATE

COMMENTS

INITIAL

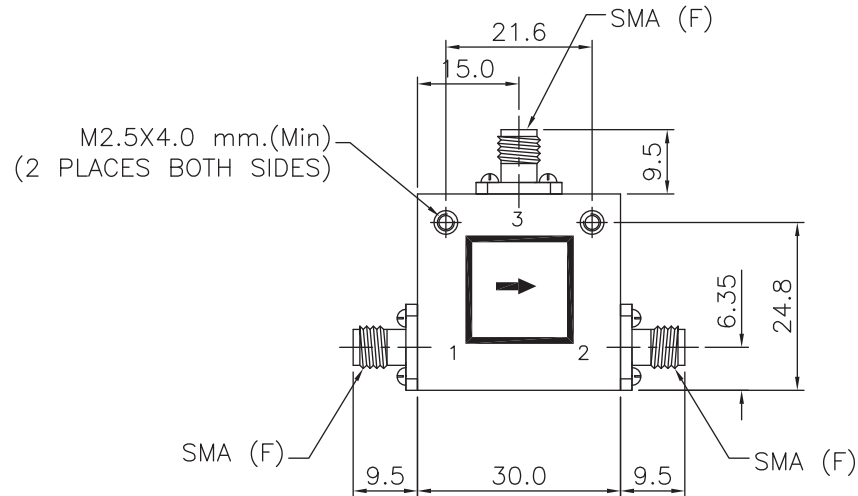
**Electrical Data**

Impedance	50 $\Omega$
Frequency Range	2.7 - 3.3 GHz.
Isolation	20 dB
Insertion Loss	0.50 dB
Average Power	15 Watts
VSWR	1.20

**Mechanical Data**

Operating Temperature : -10 °C - 50 °C

Room Temp :	+25 $\pm$ 5°C
Isolation dB ( Min. ) :	21
Insertion Loss dB ( Max. ) :	0.45
VSWR ( Max. ) :	1.18

**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: mm

**Konnect RF**

WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KCI177241**

DESCRIPTION

**Circulator, SMA Female**

CAGE CODE

**664U0**

SIGNATURE

X

**Component**  
Body

**Material**  
Aluminum

**Plating/Finish**  
Black Paint

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.