

PART NUMBER

KCI177244

REV.

DATE

COMMENTS

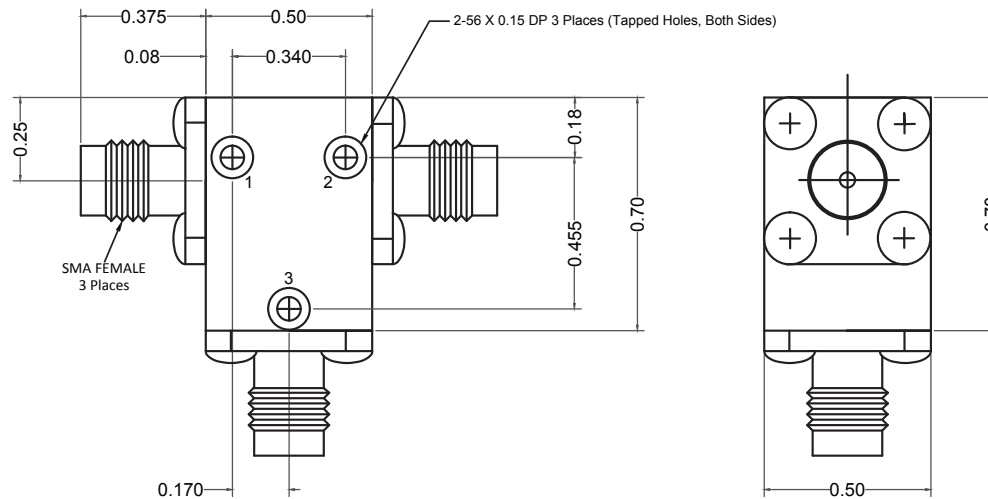
INITIAL

Electrical Data

Frequency Range 8 - 16 GHz.
 Isolation 19 Typ 17 Min
 Insertion Loss 0.50 dB Typ 0.60 Max
 Power
 Average 5W
 Peak 30 w
 VSWR 1.30 Typ 1.35 Max

Mechanical Data

Temperature Range: -20 °C - 65 °C

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: inches

Konnnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KCI177244

DESCRIPTION

Circulator, SMA

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.

Component
 Body
 Center Contact

Material
 Stainless Steel
 BeCu

Plating/Finish
 Passivated
 Gold