

PART NUMBER

KCI177248

REV.

DATE

COMMENTS

INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	29-31 GHz.
Insertion Loss	1.0 dB
Isolation	20 dB
VSWR	1.25 Max

RoHS Compliant




Mechanical Data

Temperature Range: -20 °C - 65 °C

2-56UNC X 3.50 mm.(Min)
(2 PLACES)

Room Temp :	+25 \pm 5°C
Isolation dB (Min.) :	22
Insertion Loss dB (Max.) :	0.80
VSWR (Max.) :	1.20

Forward Power : 5 W }
 Reverse Power : 5 W } 5 W on ALL Ports

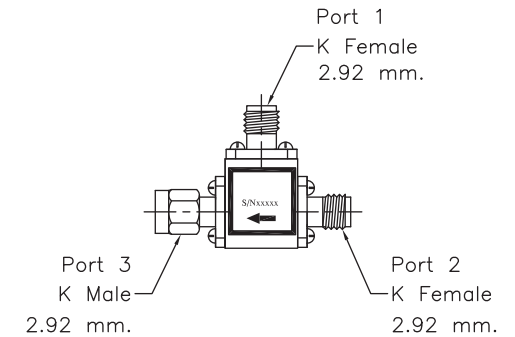

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KCI177248

DESCRIPTION

**Circulator, 2.92 Female Jack Input to
Female Jack to Male Plug Output**

CAGE CODE

664U0

SIGNATURE

X

Component	Material	Plating
Body	Aluminum	Nickel

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.