

PART NUMBER

**KCI177250**

REV.

DATE

COMMENTS

INITIAL

**Electrical Data**

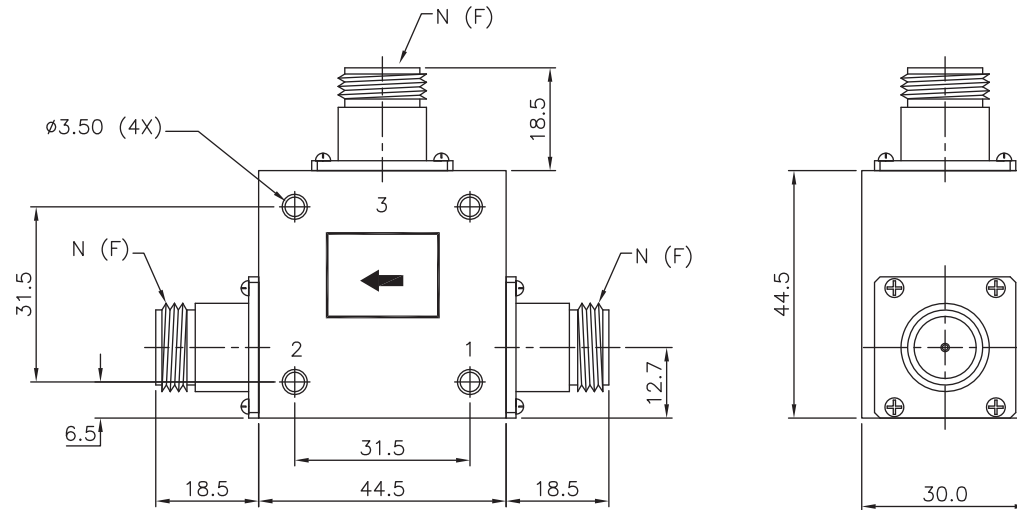
Frequency Range	2.4 - 2.6 GHz.
Insertion Loss	0.30 dB Max
Isolation	20 dB Min
VSWR	1.25 Max

**Mechanical Data**

Temperature Range:	-54 °C - 85 °C
--------------------	----------------

Room Temp :	+25±5°C
Isolation dB ( Min. ) :	22
Insertion Loss dB ( Max. ) :	0.25
VSWR ( Max. ) :	1.18

Forward Power :	400 W
Reverse Power :	400 W

**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: mm

**Konnect RF**

WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KCI177250**

DESCRIPTION

**Circulator, N Female**

CAGE CODE

**664U0**

SIGNATURE

X

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.