

PART NUMBER

**KCI177283**

REV.

DATE

COMMENTS

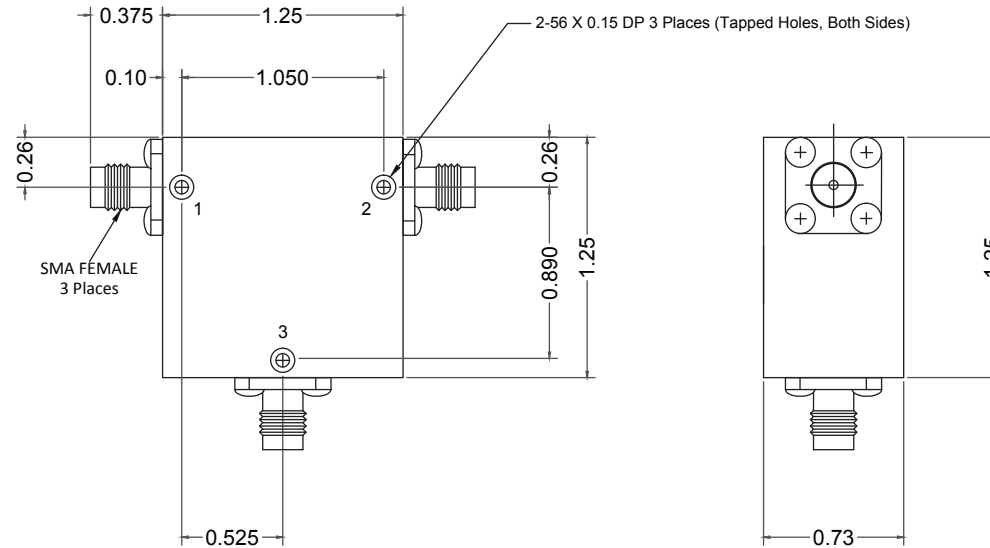
INITIAL

**Electrical Data**

Impedance	50 $\Omega$
Frequency Range	0.8 - 1.0 GHz.
Isolation	20 min
Insertion Loss	0.40 dB
Power	
Average	250 W
Peak	750 W
VSWR	1.25

**Mechanical Data**

Temperature Range: -20 °C - 65 °C

**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: inches

**Konnect RF**

WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KCI177283**

DESCRIPTION

**Circulator, SMA Female**

CAGE CODE

**664U0**

SIGNATURE

X

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.

**Component**

Body  
Center Contact

**Material**

Stainless Steel  
BeCu

**Plating/Finish**

Passivated  
Gold