

PART NUMBER

**KCI177491**

REV.

DATE

COMMENTS

INITIAL

**Electrical Data**




Impedance	50Ω
Frequency Range	18-26.50 GHz.
Isolation	18dB
Insertion Loss	0.80
VSWR	1.40 Max

**RoHS Compliant****Mechanical Data**

Temperature Range: -20 °C - 65 °C

2-56UNC X 3.50 mm.(Min)  
(2 PLACES)Spec: Forward Power : 5 W CW  
Reverse Power : 2 W CW

Note: Date Code Example : Week 25 in 2010 We Would Read 25/10

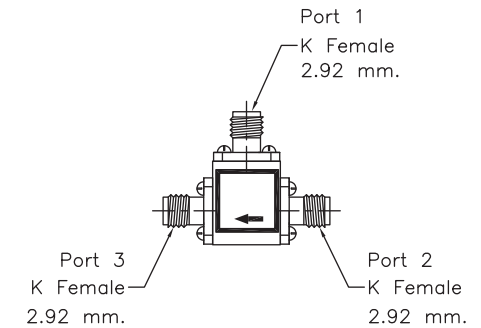

Drawing not to scale. Dimensions for reference only

Units: mm

**Konnect RF**WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KCI177491**

DESCRIPTION

**Circulator, 2.92 Female**

CAGE CODE

**664U0**

SIGNATURE

X

**Component**  
Body**Material**  
Aluminum**Plating**  
NickelTHIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.