

PART NUMBER

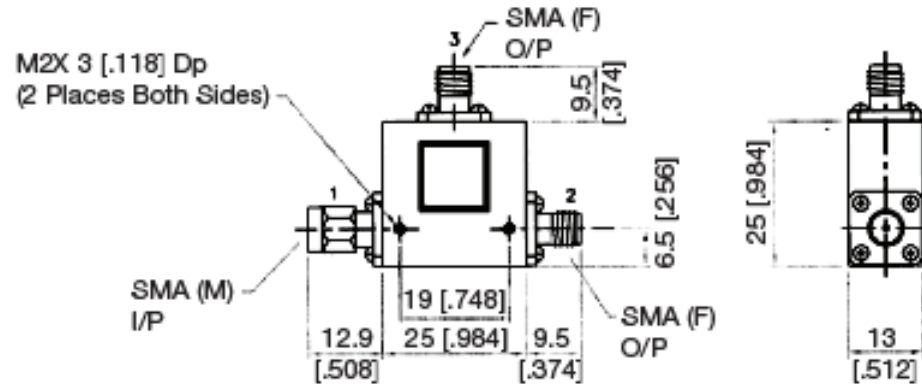
KCI177501

REV.

INITIAL

Electrical Data

| | |
|-----------------------|----------------------------|
| Frequency Range | 2.200 - 2.500 GHz |
| Isolation | 20 dB Min. |
| Insertion Loss | 0.35 dB Max. |
| VSWR | 1.25 Max. |
| Average Power | 25 Watt |
| Operating Temperature | -15° to + 65°C |
| Room Temperature | +25°C @ Spec; 22/0.30/1.18 |
| Duty Cycle | 25% |
| Pulse Width | 80 |
| Forward Power | 100 Watt |
| Reverse Power | 100 Watt |

RoHS Compliant

VSWR and Frequency Range Specifications are for reference and are dependant on cable type and other application specific conditions

Drawing not to scale. Dimensions for reference only

WWW.KONNECTRF.COM
540 NW University Blvd. Ste. 109
Port Saint Lucie, Florida, 34986
1-800-790-5887

PART NUMBER

KCI177501

DESCRIPTION

Circulator - SMA

CAGE CODE

664U0

SIGNATURE

X

Materials**Body****Black Painted**

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.