

PART NUMBER

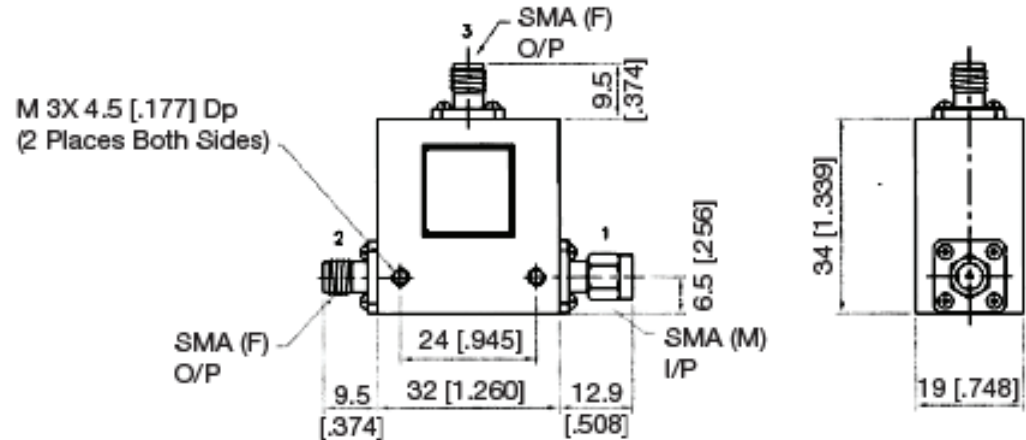
**KCI177502**

REV.

INITIAL

**Electrical Data**

Frequency Range	1.200 - 1.400 GHz
Isolation	20 dB Min.
Insertion Loss	0.40 dB Max.
VSWR	1.25 Max.
Average Power	25 Watt
Operating Temperature	-15° to + 65°C
Room Temperature	+25°C @ Spec; 22/0.30/1.18
Duty Cycle	25%
Pulse Width	80
Forward Power	100 Watt
Reverse Power	100 Watt

**RoHS Compliant**

VSWR and Frequency Range Specifications are for reference and are dependant on cable type and other application specific conditions

Drawing not to scale. Dimensions for reference only

WWW.KONNECTRF.COM  
540 NW University Blvd. Ste. 109  
Port Saint Lucie, Florida, 34986  
1-800-790-5887

PART NUMBER

**KCI177502**

DESCRIPTION

**Circulator - SMA**

CAGE CODE

**664U0**

SIGNATURE

X

**Materials**

Body

Black Painted

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.