

PART NUMBER

KCI177549

REV.

DATE

COMMENTS

INITIAL

Electrical Data

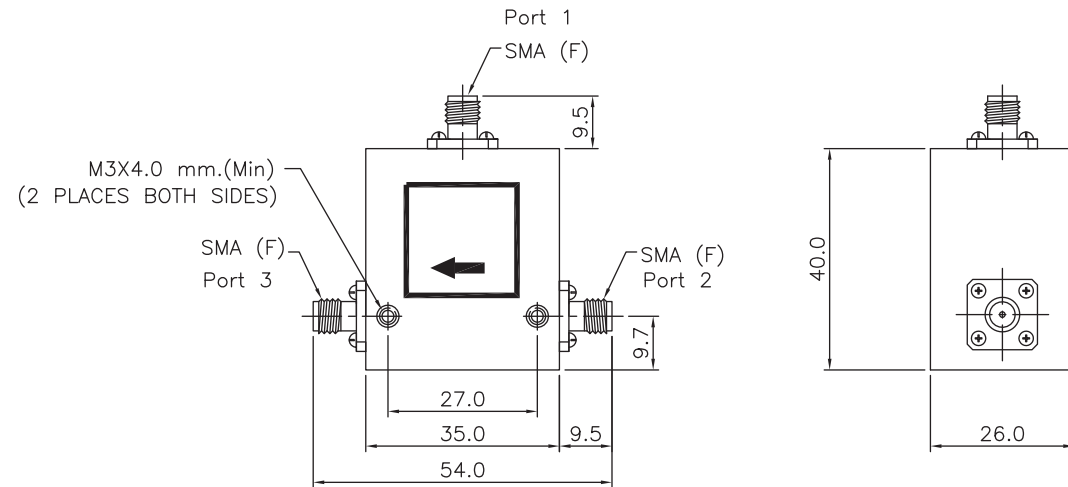
Impedance	50 Ω
Frequency Range	0.800-1.00 GHz.
Isolation	18 dB min
Insertion Loss	0.60 dB
Average Power	65 Watt
VSWR	1.35 max

Mechanical Data

Operating Temperature Range: 0 °C - +50 °C

Room Temp :	+25 \pm 5°C
Isolation dB (Min.) :	20
Insertion Loss dB (Max.) :	0.50
VSWR (Max.) :	1.25

Peak Power : 500 W

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KCI177549

DESCRIPTION

Circulator, SMA Female

CAGE CODE

664U0

SIGNATURE

X

Component
Body

Material
Aluminum

Plating
Black Paint

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.