

PART NUMBER

KCI177569

REV.

DATE

COMMENTS

INITIAL

Electrical Data

Impedance 50Ω
 Frequency Range 22.00-33.00 GHz.
 Isolation 15dB
 Insertion Loss 1.10
 VSWR 1.45 Max

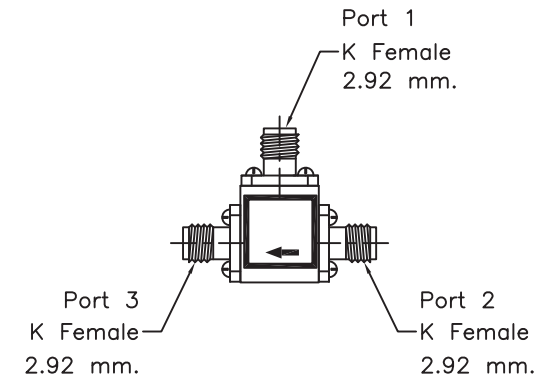


Mechanical Data

Operating Temperature Range: -10 °C - +60 °C

Spec: Forward Power : 5 W CW
 Reverse Power : 1 W CW

Note: Date Code Example : Week 25 in 2010 We Would Read 25/10

2-56UNC X 3.50 mm.(Min)
 (2 PLACES)

**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: mm

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KCI177569

DESCRIPTION

Circulator, 2.92 Female

CAGE CODE

664U0

SIGNATURE

X

Component
 Body

Material
 Aluminum

Plating
 Nickel

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.