

PART NUMBER

**KCI177884**

REV.

DATE

COMMENTS

INITIAL

**Electrical Data**

Impedance	50 $\Omega$
Frequency Range	1.000-2.000GHz.
Isolation	17 dB min
Insertion Loss	0.50 dB
Average Power	50
VSWR	1.35

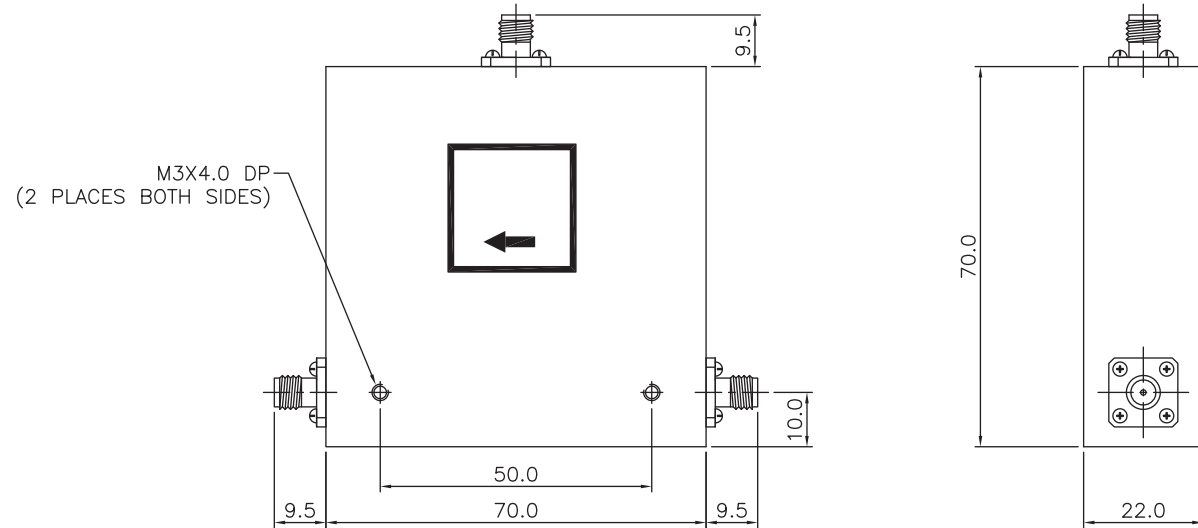
**Mechanical Data**

Operating Temperature Range: 0 °C +50 °C

NOTE : Room Temp +25 $\pm$ 5°C AT Spec: 20/0.40/1.25

Peak Power : 100 W

Direction : Clockwise

**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: mm

**Konnect RF**

WWW.KONNECTRF.COM

1-800-790-5887

PART NUMBER

**KCI177884**

DESCRIPTION

**Circulator, SMA Female**

CAGE CODE

**664U0**

SIGNATURE

X

**Component**  
Body**Material**  
Aluminum**Plating**  
Black Paint

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.