

PART NUMBER

KDCB177106

REV.

DATE

COMMENTS

INITIAL

A

03/31/15


Updated DC Input Voltage from 50V to 1,000V

*MP***Electrical Data**

Impedance 75 Ω
 Frequency Range 0.005-1.75 GHz.
 Insertion Loss ≤ 0.75 dB
 DC Input Voltage 1,000 V

RoHS Compliant**Mechanical Data**

Temperature Range: -55 $^{\circ}$ C - 90 $^{\circ}$ C
 Storage Temperature: -55 $^{\circ}$ C - 125 $^{\circ}$ C

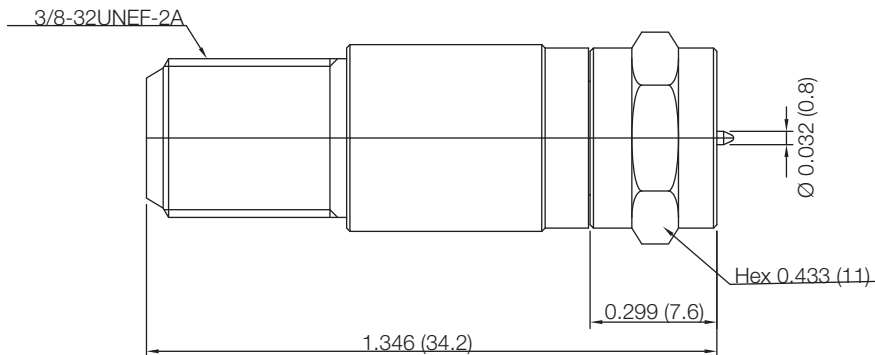

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KDCB177106

DESCRIPTION

DC Block, F Male/Female

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.

Component

Body & Couple Nut
 Center Contact

Material

Brass
 BeCu
 Brass
 Brass
 PTFE

Plating

Nickel
 Gold
 Nickel
 Nickel

Cover
 Insulator