


## DC Blocks, 50.0V, 9 kHz-26.5 GHz, SMA. Hex Body

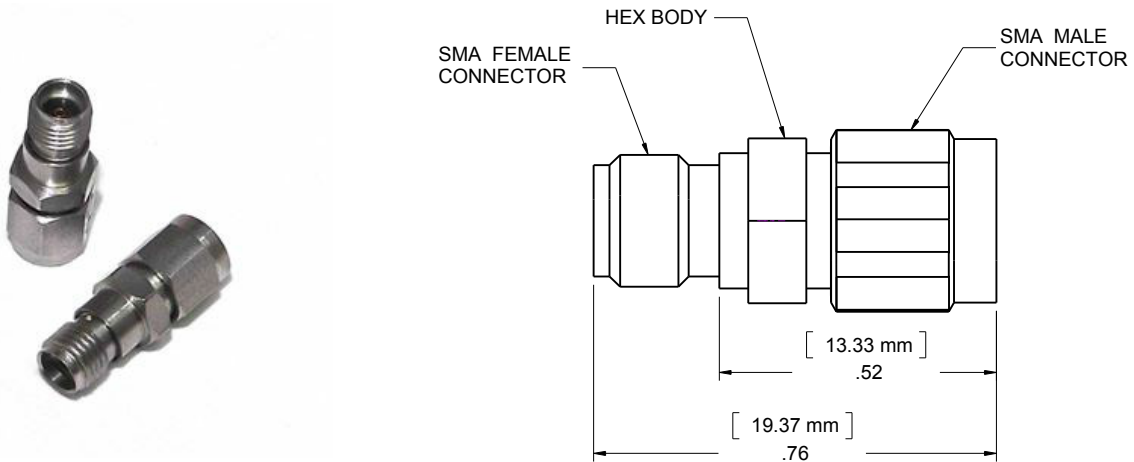

Low cut-in frequency.

**Connection & Mounting:** SMA M/F connectors per MIL-STD-348 interface dimension mate non-destructively with MIL-PRF-39012 connectors.

**Construction:** Stainless steel bodies and coupling nuts, gold plated female contacts. RoHs Compliant.

**Power:** Low Power (up to 10W)

**Average Power:** 20

**Peak Power:** 100 W

**Frequency Range:** 9 kHz to 26.5 GHz

**Nominal Impedance:** 50

**Temperature Range:** -65°C to +105°C

VSWR:	Frequency Range (GHz)	9 to 10 kHz	10 to 20 kHz	20 kHz to 18.0	18.0 to 26.5
	VSWR (max)	1.45	1.40	1.40	1.70

**Insertion Loss:** 0.8 dB

**Voltage:** 50 Vdc