

PART NUMBER

KDCB177130

REV.

DATE

COMMENTS

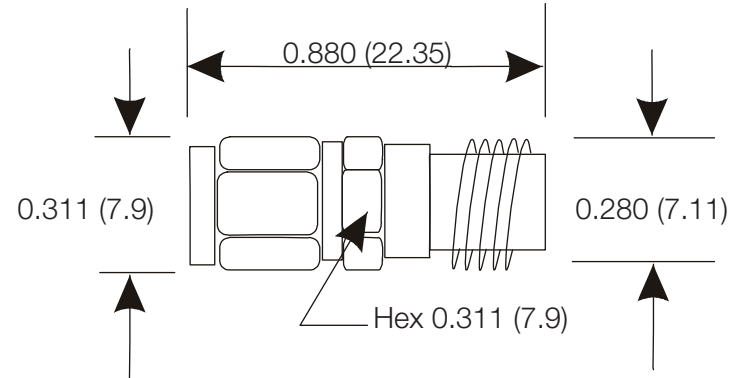
INITIAL

Electrical Data

Impedance 50 Ω
 Frequency Range 0.01 - 6.0 GHz
 Insertion Loss 0.25 dB @ 1.20 max
 0.50 dB @ 1.35 max
 Voltage 50 V
 VSWR 1.20 @ 0.01-1 GHz
 1.35 @ 1-6 GHz

Mechanical Data

Temperature Range: -65 °C - 165 °C

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KDCB177130

DESCRIPTION

DC Block, SMA M/F

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.

Component

Body
 Male Center Contact
 Female Center Contact
 Insulator

Material

Stainless Steel
 Stainless Steel
 Becu

Plating/Finish

Passivated
 Gold
 Gold