## KFL177016


## **Electrical Data**

Impedance Insertion Loss VSWR Bandpass Ripple in Band Average Power Rejection 50 Ω ≤ 3.0dB ≤ 1.5 11.3-11.5 GHz ≤1.0 dB ≤10W ≥40dB@DC-11200MHz ≥40dB@11000-13000MHz

Temperature Range Operating Environment

**Mechanical Data** 

-40  $^{\circ}\text{C}$  - 85  $^{\circ}\text{C}$  Values at the Room Temperature

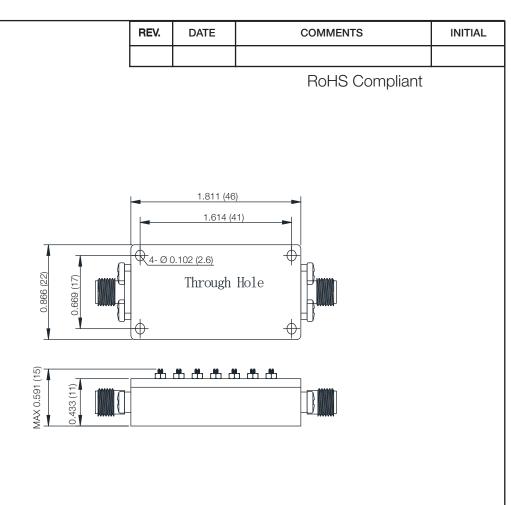

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

<b>F</b> Konnect RF	PART NUMBER		DESCRIPTION Filt	ter, Bandpass, SMA Female
<b>WWW.KONNECTRF.COM</b> 1-800-790-5887	DESIGNS IS T KONNECT RF	SIGNATURE X G INCLUDING THE HE PROPERTY OF AND IS NOT TO ANY PURPOSE R APPROVAL.	<b>Component</b> Body	<b>Plating</b> Black Painting