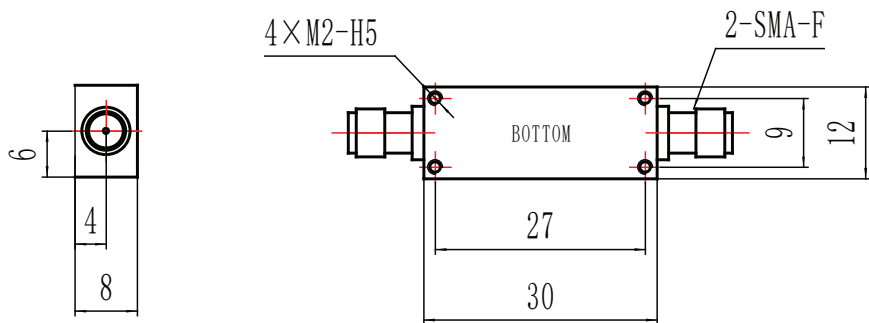


No	Item	Specification
1-1	Description	Bandpass Filter
1-2		
1-3	Center Freq	120 MHz
1-4	3dB Passband	$\geq 60$ MHz
1-5	Insertion Loss@f0	$\leq 0.8$ dB
1-6	Stopband Rejection	$\geq 60$ dBc @DC~50 MHz $\geq 28$ dBc @190 MHz
1-7	Return loss	$\geq 14$ dB
1-8	Power handing Capacity	$\geq 1$ W
1-9	Input/Output connector	SMA-F

No	Item	Specification
2-1	Operational temperature	-20°C to +75 °C
2-2	Storage temperature	-40°C to +85 °C

No.	Item	Specification
3-1	Dimensions	See Figure 3-1
<p>Figure 3-1 Unit: mm</p>  <p>Units :mm</p>		
3-2	Material	copper
3-3	Superficial treatment	Gold