

PART NUMBER

**KFL177104**

REV.

DATE

COMMENTS

INITIAL



**Electrical Data**

Impedance	50 $\Omega$
Frequency Range	18 - 42 GHz.
Insertion Loss	2.75 dB Typ. 3.0 dB Max
Power Handling	5W
Rejection	DC-15 GHz @ 60 min 15-16 GHz @ 50 min 16-17 GHz @ 20 min, 30 Typ 43-44 GHz @ 2 min, 5 Typ 44-45 GHz @ 35 min 45-46 GHz @ 55 min

VSWR	2.2 Typ 2.5 Max
------	--------------------

**Mechanical Data**

Temperature Range:	-40 °C - 70 °C
--------------------	----------------

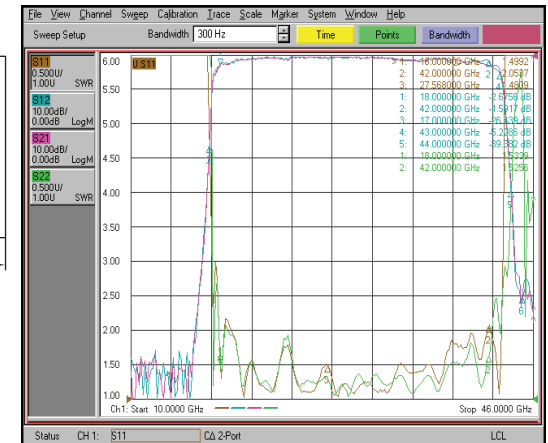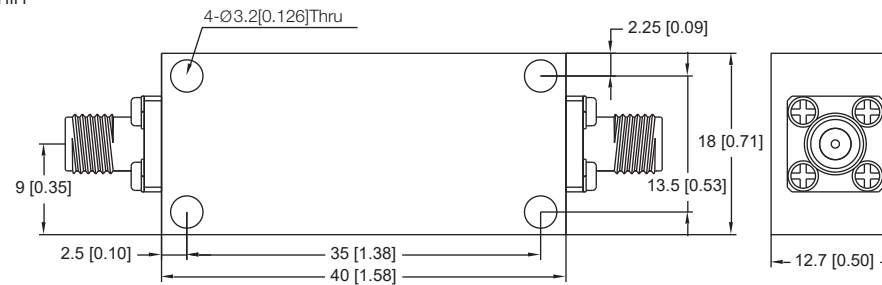

Drawing not to scale. Dimensions for reference only

Units: mm (inches)

Tolerances: Outline drawing:  $\pm 0.2$  [0.008] Hole:  $\pm 0.2$  [0.008]**Konnnect RF**

WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KFL177104**

DESCRIPTION

**Filter, Band Pass, 2.92 Female**

CAGE CODE

**664U0**

SIGNATURE

X

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.