


Center Frequency	600 MHz
3.0 dB Bandwidth	100 MHz
Insertion Loss	<1.2dB
Stopband Atten. (300 MHz)	>60dBc
Stopband Atten. (800 MHz)	>60dBc
Return Loss	14.0 dB (1.5:1 VSWR)
Input / Output Connector Type	SMA Female / SMA Female
Input / Output Impedance	50 Ω
Operational Temperature	25 °C
Storage Temperature: from	-40 °C to 85 °C
Power Handling (Long pulse):	5W
Power Handling (Instant. Peak):	10 W
Size (mm)	$\Phi 12.7 \times 40$

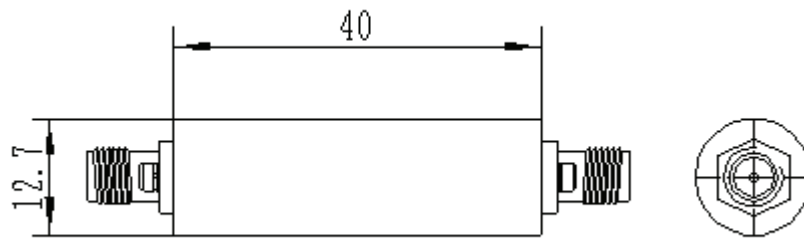

Units: mm