


3.0 dB Cut Off Frequency	300 MHz
Pass Band Insertion Loss	<1.5dB
Stopband Atten. (550 MHz)	>60dBc
Return Loss	14.0 dB(1.5:1 VSWR)
Input / Output Connector Type	N Female / N Female
Input / Output Impedance	50 $\Omega$
Operational Temperature	25 $^{\circ}$ C
Storage Temperature: from	-40 $^{\circ}$ C to 85 $^{\circ}$ C
Power Handling (Long pulse):	500W (100ms pulse, 2% duty cycle maximum)
Power Handling (Instant. Peak):	1000 W
Size (mm)	$\Phi$ 31.7 $\times$ 50

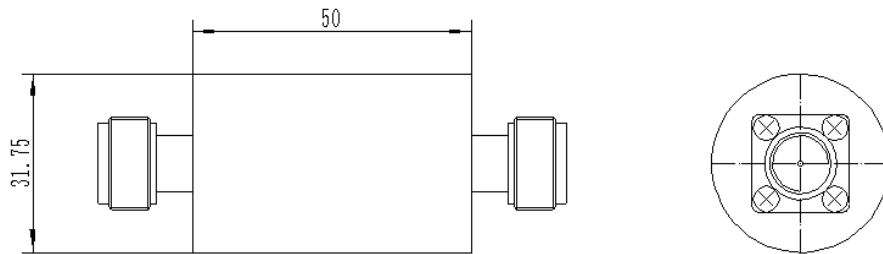

Units:mm