

PART NUMBER

KFL177331

REV.

DATE

COMMENTS

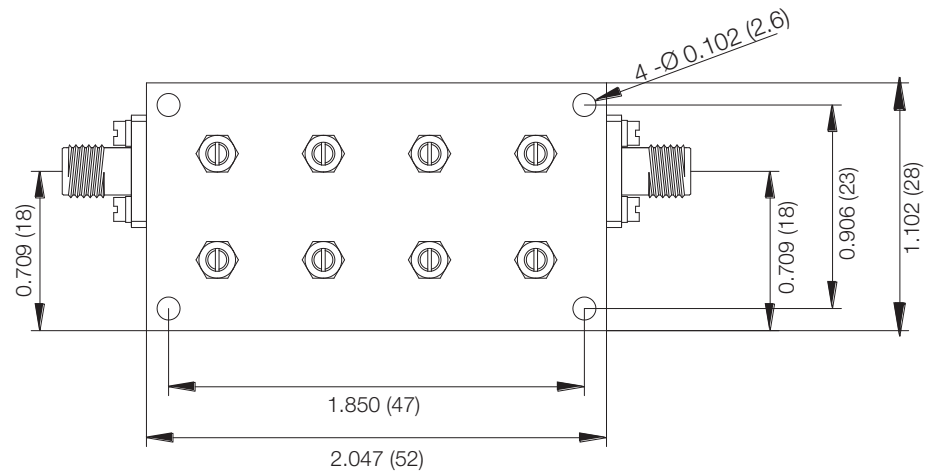
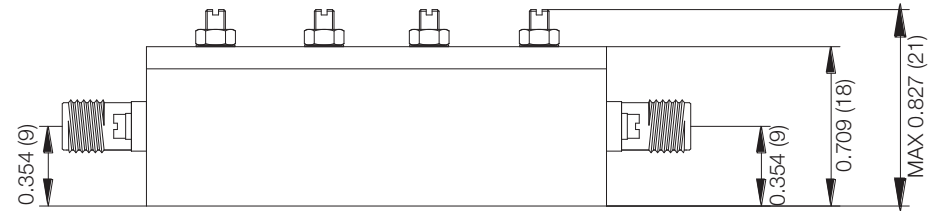
INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	4.2 - 4.4 GHz.
Insertion Loss	\leq 2.0 dB
Ripple	\leq 1.5 dB
Rejection	\geq 60 dB @ 3800-4100 MHz \geq 60 dB @ 4500-4800 MHz
Input Power	2W
VSWR	\leq 1.3

Mechanical Data

Temperature Range: -10 °C - 60 °C

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnnect RFWWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KFL177331

DESCRIPTION

Filter, Cavity, SMA Female

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.