


Bandpass Filter 720MHz \pm 200MHz

Key Specification	
Nominal Impedance	50ohm
Center Frequency	720MHz
Frequency Range	520-920MHz
Insertion Loss	\cong 1.5dB
Group Delay Ripple	\cong 4ns
Isolation	\geq 35dB@DC-320MHz \geq 35dB@1310-1500MHz
Maximum V.S.W.R	1.40:1
Temperature Range	-20~+50°C
Power	1W max.
Connector	SMA female

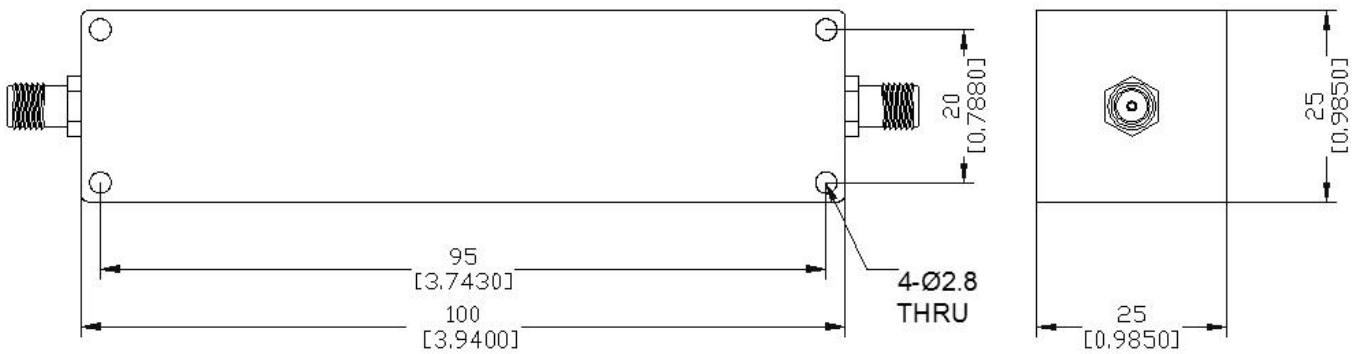

mm (Inches)